




ATTENUATOR & TERMINATION

Selection Guide



南京舜特科通信技术有限公司
Sainty-Tech Communications Limited

| October 2020

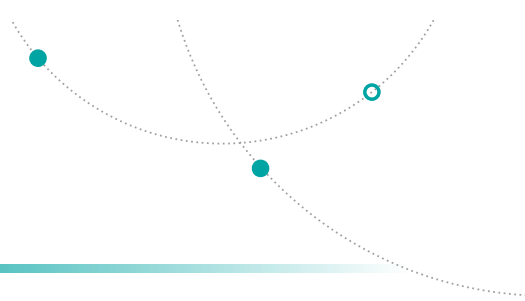

Contents

■ Attenuator

Introduction	1
Order Information	2
Coaxial Fixed Attenuator	3
Step Variable Attenuator.....	7
Inset Attenuator	8
Low PIM Attenuator.....	9

■ Termination

Introduction	10
Order Information	11
Coaxial Fixed Termination	12
Inset Termination	16
Waterproof Termination.....	17
Low PIM Termination.....	18

INTRODUCTION

The Attenuators are used in absorbing energy of transmission lines, expanding power range and controlling power level. They are also used in accurately measuring power or spectrum of RF microwave transmitters using a small power meter, comprehensive tester or spectrum analyzer.

Coaxial fixed attenuators feature wide frequency band of DC-67GHz, with power handling capabilities of 1W to 10KW, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout etc.

The Step Variable attenuators can be used to adjust the power signal level continuously or by step within certain frequency range. They can also be used to adjust the test system's power level as inset attenuators, it is small with high accuracy and high stability etc..

The Inset attenuators feature flat attenuation value, high precision; Anti-pulse, burnt-out capacity; can provide Low PIM products; Installed in the case, small in size, stable and reliable.

The Low PIM attenuators can be used in intermodulation test terminals for intermodulation tests, and it's own passive Intermodulation won't affect the measurement. The termination can also be used in high precision test and measuring of amplifiers.



ORDER INFORMATION

SAT 18 A 02 10 18

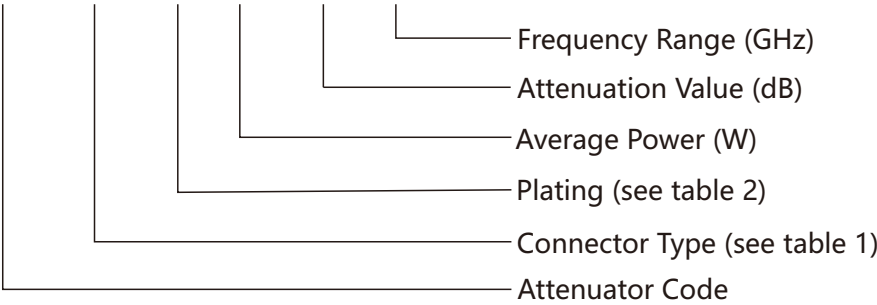


Table 1: Connector Type

Code	Connector Type	Note
17	SSMA	
18	SMA	
26	TNC	
27	N	
28	7/16	
30	QMA	
32	F	75Ω
36	2.92mm	
38	2.4mm	
39	3.5mm	
47	4.3/10	
62	SMA	Reverse Polarity
76	N	75Ω
80	1.85mm	

Table 2: Plating

Code	Plating Series	
	Inner Conductor	Body
A	Gold	Gold
B	Gold	Nickel
D	Gold	Stainless Steel Passivated
M	Silver	Ternary Alloy(SUCO)

Coaxial Fixed Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	Nominal Attenuation Value(dB)	Connector Type	Datasheet
SAT80D02XX67	2	0.2	DC	67	1.35-1.45	3,6,10,20	1.85mm	
SAT38D02XX40	2	0.2	DC	40	1.35	1-9,10,20,30	2.4mm	
SAT38D05XXXX	5	0.2	DC	40	1.20-1.40	1-9,10,20,30,40	2.4mm	
SAT38D10XXXX	10	0.2	DC	40	1.25-1.40	10,20,30,40	2.4mm	
SAT38D20XXXX	20	0.2	DC	40	1.30-1.40	10,20,30,40	2.4mm	
SAT36D02XX26	2	0.2	DC	26.5	1.25	1-9,10-19,20-30,40	2.92mm	
SAT36D02XXXX	2	0.2	DC	40	1.30-1.40	1-9,10-20,20-30,40	2.92mm	
SAT36D05XX26	5	0.2	DC	26.5	1.25	1-9,10-20,20-30,40	2.92mm	
SAT36D05XXXX	5	0.2	DC	40	1.30-1.40	1-9,10-20,20-30,40	2.92mm	
SAT36D10XXXX	10	0.2	DC	40	1.25-1.40	10,20,30,40	2.92mm	
SAT36D20XXXX	20	0.2	DC	40	1.30-1.40	10,20,30,40	2.92mm	
SAT36D30XXXX	30	0.2	DC	40	1.30-1.50	30,40	2.92mm	
SAT36D50XX40	50	0.2	DC	40	1.6	30,40	2.92mm	
SAT36D100XXXX	100	0.5	DC	26.5	1.30-1.40	10,20,30,40	2.92mm	
SAT39A02XXXX	2	0.5	DC	26.5	1.15-1.25	1-10,10-20,20-30,40,50,60,70	3.5mm	
SAT39A05XXXX	5	0.5	DC	26.5	1.15-1.25	1-9,10-19,20-30,40,50,60	3.5mm	
SAT39A10XXXX	10	1	DC	26.5	1.15-1.25	1-10,20,30,40,50,60	3.5mm	
SAT39A25XXXX	25	1	DC	26.5	1.20-1.30	3,6,10,20,30,40,50,60	3.5mm	
SAT39A50XXXX	50	1	DC	26.5	1.20-1.30	3,6,10,20,30,40,50,60	3.5mm	
SAT39A100XXXX	100	0.5	DC	26.5	1.15-1.40	3,6,10,20,30,40,50	3.5mm	
SAT18A02XXXXS	2	0.5	DC	26.5	1.20-1.30	1-6,7-8,9-12	SMA	
SAT18A02XXXX	2	0.5	DC	18	1.20-1.35	1-9,10,20,30	SMA	
SAT18X02XXXXG	2	0.5	DC	18	1.25-1.30	1-9,10,20,30,40,50	SMA	
SAT18A02XXXXG2	2	0.5	DC	26.5	1.15-1.35	1-9,10,20,30	SMA	
SAT18D02XXXXKF	2	0.5	DC	26.5	1.15-1.35	1-9,10,20,30	SMA	
SAT18A02XXXXGH	2	0.5	DC	26.5	1.25-1.35	30,40,50,60,70,80,90	SMA	
SAT18B05XXXX	5	0.5	DC	26.5	1.15-1.35	3,6,10,20,30,40,50	SMA	
SAT18B10XXXX	10	0.5	DC	26.5	1.15-1.35	3,6,10,20,30,40	SMA	
SAT18B25XXXX	25	1	DC	26.5	1.20-1.35	10,20,30,40	SMA	
SAT18B50XXXX	50	1	DC	26.5	1.20-1.30	10,20,30,40,50,60	SMA	
SAT62A02XXXX	2	0.5	DC	6	1.15-1.20	1-9,10,20,30	RP SMA	
SAT17A02XXXX	2	0.2	DC	18	1.25-1.35	1-9,10,20,30	SSMA	

Coaxial Fixed Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	Nominal Attenuation Value(dB)	Connector Type	Datasheet
SAT27B02XXXX	2	0.5	DC	6	1.10-1.25	1-9,10,20,30,40	N	
SAT27B02XXXXG	2	0.5	DC	18	1.30-1.40	1-9,10,20,30,40,50	N	
SAT27B02XXXXGH	2	0.5	DC	18	1.25-1.35	40,50,60,70,80,90	N	
SAT27B05XXXX	5	1	DC	6	1.10-1.30	1-9,10,20,30,40	N	
SAT27B05XXXXG	5	1	DC	18	1.30-1.40	1-9,10,20,30,40,50	N	
SAT27B05XXXXGH	5	1	DC	18	1.25-1.35	40,50,60,70,80,90	N	
SAT27B10XXXX	10	1	DC	6	1.10-1.30	1-9,10,20,30,40	N	
SAT27B10XXXXG	10	1	DC	18	1.30-1.40	3,6,10,20,30,40	N	
SAT27B10XXXXGH	10	1	DC	18	1.20-1.40	10,20,30,40,50,60	N	
SAT27B25XXXX	25	1	DC	6	1.10-1.30	1-9,10,20,30,40,50	N	
SAT27B25XXXXG	25	1	DC	18	1.30-1.40	10,20,30,40	N	
SAT27B25XX18GD	25	1	DC	18	1.3	10,20,30,40,50,60,70	N	
SAT27B25XXXXGH	25	1	DC	18	1.25-1.40	10,20,30,40,50,60	N	
SAT27B30XXXX	30	1	DC	6	1.10-1.30	1-9,10,20,30,40	N	
SAT27B30XXXXGA	30	5	DC	6	1.10-1.20	3/6,10,20,30,40	N	
SAT27B30XXXXGB	30	5	DC	10	1.30-1.35	3/6,10,20,30,40	N	
SAT27B50XXXXA	50	10	DC	4	1.15-1.35	1-9,10,20,30,40	N	
SAT27B50XXXX	50	5	DC	4	1.15-1.35	1-9,10,20,30,40	N	
SAT27B50XXXXG	50	5	DC	10	1.10-1.35	3/6,10,20,30,40	N	
SAT27B50XXXXGHC	50	1	DC	18	1.15-1.35	3,6,10,20,30,40	N	
SAT27B50XXXXGHD	50	1	DC	18	1.20-1.30	10,20,30,40,50,60	N	
SAT27B50XXXXGH	50	1	DC	18	1.30-1.35	10,20,30,40	N	
SAT27B50XXXXS	50	5	DC	10	1.10-1.35	3/6,10,20,30,40,50	N	
SAT27B60XXXX	60	10	DC	4	1.15-1.35	1-9,10,20,30,40	N	
SAT27B60XXXXG	60	5	DC	10	1.10-1.35	3/6,10,20,30,40,50	N	
SAT27B80XXXX	80	10	DC	4	1.15-1.35	10,20,30,40	N	
SAT27B80XXXXG	80	1	DC	18	1.25-1.40	10,20,30,40	N	
SAT27B80XXXXW	80	5	DC	10	1.15-1.40	3,6,10,20,30,40	N	
SAT27B100XXXX	100	10	DC	4	1.15-1.35	10,20,30,40-50	N	
SAT27B1003004D	100	5	DC	4	1.25	30	N	
SAT27B100XXXXB	100	5	0.7	3	1.15-1.20	30,40	N	
SAT27B100XXXXG	100	1	DC	18	1.30-1.45	3,6,10,20,30, 40,50	N	

Coaxial Fixed Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	Nominal Attenuation Value(dB)	Connector Type	Datasheet
SAT27B100XXXGA	100	1	DC	18	1.35-1.45	3,6,10,20,30,40,50	N	
SAT27B100XXXGC	100	1	DC	18	1.20-1.45	3,6,10,20,30,40	N	
SAT27B100XXXW	100	5	DC	10	1.15-1.45	3,6,10,20,30,40	N	
SAT27B100XXXWC	100	5	DC	10	1.15-1.45	3,6,10,20,30,40	N	
SAT27B150XXXX	150	10	DC	4	1.15-1.40	10,20,30,40-50	N	
SAT27B150XXXG	150	1	DC	18	1.30-1.45	3,6,10,20,30,40,50	N	
SAT27B150XXXGA	150	1	DC	18	1.25-1.45	3,6,10,20,30,40,50	N	
SAT27B150XXXW	150	5	DC	10	1.15-1.45	3,10,20,30,40	N	
SAT27B200XXXX	200	10	DC	4	1.20-1.40	10,20,30,40-50	N	
SAT27B200XXXW	200	5	DC	10	1.15-1.45	10,20,30,40	N	
SAT27B200XXXG	200	1	DC	18	1.25-1.50	10,20,30,40,50	N	
SAT27B250XXXX	250	10	DC	4	1.20-1.40	10,20,30,40-50	N	
SAT27B25040XXB	250	5	DC	5	1.15	40	N	
SAT27B250XXXW	250	5	DC	10	1.20-1.45	10,20,30,40	N	
SAT27B250XXXG	250	1	DC	18	1.25-1.55	10,20,30,40,50	N	
SAT27B300XXXX	300	10	DC	4	1.20-1.50	10,20,30,40-50	N	
SAT27B300XXXGH	300	1	DC	18	1.30-1.55	10,20,30,40,50	N	
SAT27B300XXXW	300	5	DC	10	1.25-1.45	10,20,30,40-50	N	
SAT27B350XXXG	350	1	DC	13	1.30-1.50	6,10,20,30,40	N	
SAT27B3503004GH	350	1	DC	4	1.3	30	N	
SAT27B400XXXX	400	10	DC	4	1.20-1.50	10,20,30,40,50	N	
SAT27B400XXXW	400	5	DC	10	1.25-1.45	40,50	N	
SAT27B500XXXX	500	10	DC	4	1.20-1.50	10,20,30,40,50	N	
SAT27B500XXXW	500	5	DC	10	1.25-1.45	30,40,50	N	
SAT27B800XXXX	800	10	DC	4	1.20-1.50	40,50,60	N	
SAT27B80050XXW	800	5	DC	8	1.35-1.45	50	N	
SAT27B100050XXW	1000	5	DC	6	1.35	50	N	
SAT27B1000XX03G	1000	10	DC	3	1.4	40,50	N	
SAT27B1000XX02	1000	50	DC	2	1.20-1.30	30,40,50	N	
SAT27B1500XX03G	1500	10	DC	3	1.4	40,50	N	
SAT27B2000XX03G	2000	10	DC	3	1.4	40,50	N	
SAT27B2000XX02	2000	50	DC	2	1.20-1.30	30,40,50	N	

Coaxial Fixed Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	Nominal Attenuation Value(dB)	Connector Type	Datasheet
SAT27B3000XX02	3000	50	DC	2	1.3	30,40,50	N	
SAT27B4000XX01	4000	100	DC	1	1.4	30,40,50	N	
SAT28B5000XX01	5000	100	DC	1	1.4	30,40,50	7/16	
SAT28B10000XX01	10000	100	DC	1	1.4	30,40,50	7/16	
SAT76B02XXXX	2	0.5	DC	3	1.15-1.25	10,20,30	N(75Ω)	
SAT76B05XXXX	5	0.5	DC	3	1.15-1.25	10,20,30	N(75Ω)	
SAT26B02XXXX	2	0.5	DC	18	1.15-1.35	1-9,10,20,30	TNC	
SAT26B02XXXXH	2	0.5	DC	18	1.15-1.35	40,50,60,70,80,90	TNC	
SAT26B05XXXX	5	0.5	DC	18	1.15-1.35	1-9,10,20,30	TNC	
SAT26B05XXXXH	5	0.5	DC	18	1.15-1.35	40,50,60,70,80,90	TNC	
SAT26B10XXXX	10	1	DC	18	1.15-1.35	1-9,10,20,30	TNC	
SAT26B10XXXXH	10	1	DC	18	1.15-1.35	40,50,60,70,80,90	TNC	
SAT26B25XXXX	25	1	DC	18	1.15-1.35	10,20,30,40	TNC	
SAT26B50XXXXA	50	1	DC	18	1.15-1.40	3,6,10,20,30,40	TNC	
SAT26B50XXXXB	50	1	DC	18	1.15-1.30	10,20,30,40	TNC	
SAT26B100XXXX	100	1	DC	18	1.30-1.40	10,20,30,40	TNC	
SAT26B150XXXX	150	1	DC	18	1.30-1.45	10,20,30,40	TNC	
SAT26B200XXXX	200	1	DC	18	1.30-1.50	30,40	TNC	
SAT47B10XXXX	10	1	DC	6	1.20-1.25	1-9,10,20,30,40	4.3-10	
SAT47B25XXXX	25	1	DC	6	1.20-1.25	1-9,10,20,30,40	4.3-10	
SAT47B50XXXX	50	5	DC	8	1.15-1.30	10,20,30,40	4.3-10	
SAT47B100XXXXD	100	5	DC	4	1.20-1.25	20,30,40	4.3-10	
SAT47B100XXXXW	100	5	DC	6	1.20-1.30	10,20,30,40	4.3-10	
SAT47B150XXXXW	150	5	DC	6	1.20-1.30	10,20,30,40	4.3-10	
SAT47B200XXXXW	200	5	DC	6	1.20-1.30	10,20,30,40	4.3-10	
SAT32B01XX01K	1	0.5	0.1	1	1.15	10,20,30,40	F	
SAT32B01XX01	1	0.5	DC	1	1.1	1/2/4/8,10,16,20	F	
SAT30A02XXXX	2	0.5	DC	6	1.15-1.20	1-9,10,20,30	QMA	

* Please contact with us if you can't find the right products in the list, Customization is available.

Step Variable Attenuator

www.sainty-tech.com

Part Number	Type	Average Power(W)	Low Freq. (GHz)	High Freq. (GHz)	Attenuation Range (dB)	VSWR	IL (dB)	Connector Type	Datasheet
SATRXX-1-XX-X-A1	Rotary	2,10	DC	6	0-1/0.1;0-10/1;0-60/1;0-90/10	1.25-1.4	1	SMA,N	
SATRXX-2-XX-X-A2	Rotary	2,10	DC	6	0-11/0.1;0-50/1;0-70/1;0-100/1	1.30-1.55	1.8	SMA,N	
SATRXX-2-XX-X-A3	Rotary	2,10	DC	6	0-11/0.1;0-70/1;0-100/1	1.40-1.65	1.8	N	
SATRXX-3-XX-X-A4	Rotary	2,10	DC	6	0-71/0.1;0-101/0.1	1.50-1.75	2.5	N	
SATRXX-1-XX-X-A5	Rotary	2,10,25	DC	18	0-9/1;0-60/10;0-70/10;0-90/10	1.40-1.80	1.8	SMA	
SATRXX-2-XX-X-A6	Rotary	2,5	DC	18	0-69/1;0-99/1	1.50-1.75	1.5	SMA	
SATRXX-2-XX-X-A7-B	Rotary	2,10	DC	26.5	0-69/1;0-99/1	1.50-1.85	2	N,SMA,3.5mm	
SATRXX-1-XX-X-A8-B	Rotary	2,10,25	DC	28	0-9/1;0-60/1;0-70/10;0-90/10	1.60-1.75	1.8	3.5mm,SMA	
SATR02-3-99.9-X-A9	Rotary	2	DC	18	0-99.9/0.1	1.50-2.0	1.7	3.5mm,SMA,N	
SATPXX-1-20-X-B	Pushbutton	2,5,10	DC	4	0-20/20	1.30-1.40	1.2	N,SMA,BNC,F	
SATPXX-2-30-X-B	Pushbutton	2,5,10	DC	4	0-30/10	1.40-1.50	3	N,SMA,BNC,F	
SATPXX-4-10-X-B	Pushbutton	2,5,10	DC	4	2000/10/1	1.40-1.55	3.5	N,SMA,BNC,F	
SATPXX-5-XX-X-B	Pushbutton	2,5,10	DC	4	0-20/1;0-30/1	1.40-1.55	4	N,SMA,BNC,F	
SATPXX-6-40-X-B	Pushbutton	2,5,10	DC	4	0-40/1	1.40-1.55	4.5	N,SMA,BNC,F	
SATPXX-8-10-X-B	Pushbutton	2,5,10	DC	4	0-10/0.1	1.40-1.50	1.8	N,SMA,BNC,F	
SATPXX-8-60-X-B	Pushbutton	2,5,10	DC	4	0-60/1	1.40-1.75	5	N,SMA,BNC,F	
SATPXX-8-70-X-B	Pushbutton	2,5,10	DC	4	0-70/1	1.40-1.75	5	N,SMA,BNC,F	
SATPXX-8-90-X-B	Pushbutton	2,5,10	DC	4	0-90/1	1.40-1.75	5	N,SMA,BNC,F	
SATP25-5-XX-X-B	Pushbutton	25	DC	3.5	0-23/1;0-30/1	1.30-1.80	9	N	

Inset Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	Nominal Attenuation Value(dB)	Connector Type	Datasheet
SAT27B50XXXXN	50	10	DC	4	1.25-1.35	3,6,10,20,30,40	N	
SAT27B100XXXXN	100	10	DC	4	1.25-1.40	3,6,10,20,30,40	N	
SAT27B300XXXXN	300	10	DC	4	1.25-1.40	3,6,10,20,30,40	N	
SAT27B50XXXXWN	50	5	DC	10	1.20-1.35	10,20,30	N	
SAT27B50XXXXGN	50	5	DC	18	1.20-1.40	10,20,30,40	N	
SAT27B100XXXXWN	100	5	DC	10	1.25-1.40	20,30,40	N	
SAT27B200XXXXWN	200	5	DC	10	1.25-1.40	10,20,30,40	N	

Low PIM Attenuator

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	VSWR	IM3 Value (dB)	Connector Type	Datasheet
SAT27M02XX03LIM	2	0.5	DC	3	1.2	$\leq -120\text{dBc}$	N	
SAT27M05XX03LIM	5	0.5	DC	3	1.2	$\leq -120\text{dBc}$	N	
SAT27M10XX03LIM	10	1	DC	3	1.2	$\leq -120\text{dBc}$	N	
SAT27M25XX03LIM	25	1	DC	3	1.2	$\leq -120\text{dBc}$	N	
SAT27M50XX03LIM	50	10	DC	3	1.3	$\leq -120\text{dBc}$	N	
SAT27M100XX03LIM	100	10	DC	3	1.3	$\leq -120\text{dBc}$	N	

INTRODUCTION

The terminations absorb RF & microwave energy and are commonly used as dummy loads for antennas and transmitters. They are also used as matching ports in many multi-port microwave devices such as circulators and directional couplers to terminate the ports that are not involved in the measurement, in order to ensure accurate measurement.

The Coaxial fixed termination feature wide frequency range, DC-67GHz, 1W to 10KW, low VSWR, High reliability, repeatable performance, excellent capacity in anti-pulse and anti-burnout.

The Inset terminations are used in quantitatively absorbing energy of RF and microwave systems, they are commonly used as dummy loads for antennas and transmitters. The wide-band Inset termination's average power is from 5W-300W, frequency range from DC-26.5GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

The High power coaxial waterproof terminations are used in quantitatively absorbing energy of RF and microwave system, they are commonly used as dummy loads of antennas and transmitters. The waterproof terminations' average power is from 2W to 100W, frequency range from DC-4GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

The Low PIM terminations are typically used in intermodulation test terminals for intermodulation testing and designed in a way that their own passive Intermodulation will no affect the measurment. The termination can also be used in high precision testing and measurment of amplifiers.



ORDER INFORMATION

ST 18 X A-50-2W-18

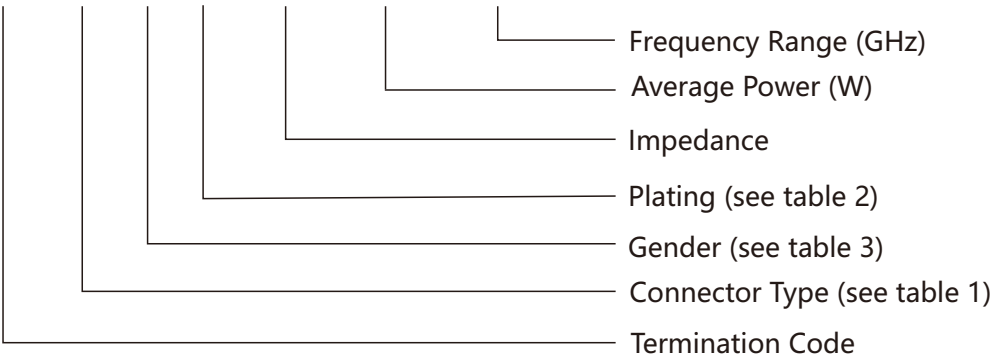


Table 1: Connector Type

Code	Connector Type	Note
17	SSMA	
18	SMA	
25	BNC	
26	TNC	
27	N	
28	7/16	
30	QMA	
36	2.92mm(SMK)	
38	2.4mm	
39	3.5mm	
47	4.3/10	
62	SMA	Reversse Polarity
74	BNC	75Ω
76	N	75Ω
80	1.85mm	

Table 2: Plating

Code	Plating Series	
	Inner Conductor	Body
A	Gold	Gold
B	Gold	Nickel
D	Gold	Stainless Steel Passivated
M	Silver	Ternary Alloy(SUCO)

Table 3: Gender

1	Male
2	Female

Coaxial Fixed Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST80XD-50-2W-67	2	0.2	DC	67	1.45	1.85mm	
ST38XD-50-2W-XX	2	0.2	DC	50	1.30-1.35	2.4mm	
ST38XD-50-5W-XX	5	0.2	DC	50	1.30-1.40	2.4mm	
ST36XD-50-2W-26	2	0.2	DC	26.5	1.20-1.25	2.92mm	
ST36XD-50-2W-XX	2	0.2	DC	40	1.35	2.92mm	
ST36XD-50-5W-XX	5	0.2	DC	40	1.20-1.35	2.92mm	
ST361D-50-10W-XX	10	0.2	DC	40	1.25-1.35	2.92mm(M)	
ST361D-50-20W-XX	20	0.2	DC	40	1.25-1.35	2.92mm(M)	
ST361D-50-50W-XX	50	0.2	DC	40	1.25-1.40	2.92mm(M)	
ST39XA-50-2W-XX	2	0.5	DC	26.5	1.15-1.20	3.5mm	
ST39XA-50-5W-XX	5	0.5	DC	26.5	1.15-1.20	3.5mm	
ST39XA-50-10W-XX	10	1	DC	26.5	1.15-1.25	3.5mm	
ST39XA-50-25W-XX	25	1	DC	26.5	1.15-1.25	3.5mm	
ST39XA-50-50W-XX	50	1	DC	26.5	1.15-1.25	3.5mm	
ST181B-50-1W-XXP	1	0.1	DC	18	1.05-1.30	SMA(M)	
ST18XB-50-2W-XX	2	0.25	DC	26.5	1.20-1.25	SMA	
ST181B-50-2W-XXE	2	0.25	DC	18	1.10-1.35	SMA(M)	
ST181B-50-2W-XXG	2	0.25	DC	18	1.20-1.25	SMA(M)	
ST18XB-50-5W-XX	5	0.5	DC	26.5	1.10-1.30	SMA	
ST18XB-50-10W-XX	10	1	DC	26.5	1.10-1.30	SMA	
ST18XB-50-25W-26	25	0.5	DC	26.5	1.3	SMA	
ST18XB-50-50W-26	50	1	DC	26.5	1.3	SMA	
ST629B-50-2W-XX	2	0.1	DC	12.4	1.15-1.25	RP SMA(M)	
ST17XA-50-2W-XX	2	0.25	DC	18	1.20-1.30	SSMA	
ST271B-50-2W-XX	2	0.5	DC	6	1.15-1.25	N(M)	
ST271B-50-2W-XXGH	2	0.5	DC	18	1.10-1.30	N(M)	
ST281B-50-2W-03	2	0.2	DC	3	1.1	7/16(M)	
ST271B-50-2W-XXE	2	0.5	DC	8	1.10-1.25	N(M)	
ST271B-50-5W-XXP	5	0.5	DC	8	1.10-1.20	N(M)	
ST271B-50-5W-XX	5	1	DC	6	1.15-1.25	N(M)	
ST271B-50-5W-XXE	5	1	DC	6	1.15-1.25	N(M)	
ST271B-50-5W-XXGH	5	1	DC	18	1.10-1.30	N(M)	

Coaxial Fixed Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST281B-50-5W-03	5	0.5	DC	3	1.1	7/16(M)	
ST261B-50-6W-XX	6	0.5	DC	8	1.10-1.20	TNC(M)	
ST271B-50-10W-XX	10	1	DC	6	1.15-1.20	N(M)	
ST271B-50-10W-XXGH	10	1	DC	18	1.35-1.40	N(M)	
ST271B-50-10W-XXE	10	1	DC	4	1.15-1.30	N(M)	
ST271B-50-25W-XX	25	1	DC	6	1.15-1.25	N(M)	
ST271B-50-25W-XXGH	25	1	DC	18	1.25-1.40	N(M)	
ST271B-50-25W-XXE	25	1	DC	4	1.10-1.30	N(M)	
ST271B-50-30W-XX	30	1	DC	6	1.15-1.25	N(M)	
ST271B-50-30W-XXE	30	1	DC	4	1.15-1.30	N(M)	
ST271B-50-50W-XXA	50	10	DC	4	1.05-1.20	N(M)	
ST271B-50-50W-XX	50	1	DC	6	1.10-1.25	N(M)	
ST271B-50-50W-XXE	50	1	DC	10	1.10-1.25	N(M)	
ST271B-50-50W-XXW	50	5	DC	10	1.15-1.55	N(M)	
ST271B-50-50W-XXGH	50	1	DC	18	1.25-1.40	N(M)	
ST271B-50-50W-XXGHC	50	1	DC	18	1.15-1.35	N(M)	
ST271B-50-60W-XX	60	10	DC	4	1.05-1.20	N(M)	
ST271B-50-60W-XXG	60	5	DC	10	1.10-1.35	N(M)	
ST271B-50-80W-XX	80	5	DC	4	1.15-1.25	N(M)	
ST271B-50-80W-XXGH	80	1	DC	18	1.20-1.40	N(M)	
ST271B-50-80W-XXW	80	5	DC	18	1.15-1.55	N(M)	
ST271B-50-100W-XX	100	10	DC	4	1.10-1.25	N(M)	
ST271B-50-100W-XXG	100	1	DC	18	1.30-1.40	N(M)	
ST271B-50-100W-XXGC	100	1	DC	18	1.25-1.35	N(M)	
ST27XB-50-100W-XXW	100	5	DC	18	1.15-1.55	N	
ST271B-50-150W-XX	150	10	DC	4	1.15-1.30	N(M)	
ST271B-50-150W-XXG	150	1	DC	18	1.35-1.40	N(M)	
ST271B-50-150W-XXGC	150	1	DC	18	1.25-1.35	N(M)	
ST271B-50-150W-XXW	150	5	DC	10	1.15-1.35	N(M)	
ST272B-50-150W-XXWC	150	5	DC	18	1.15-1.55	N(F)	
ST271B-50-200W-XX	200	10	DC	4	1.15-1.30	N(M)	
ST271B-50-200W-XXG	200	1	DC	18	1.25-1.40	N(M)	

Coaxial Fixed Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST27XB-50-200W-XXW	200	5	DC	18	1.10-1.35	N	
ST271B-50-250W-XX	250	10	DC	4	1.15-1.35	N(M)	
ST271B-50-250W-XXG	250	1	DC	18	1.25-1.40	N(M)	
ST271B-50-250W-XXW	250	5	DC	10	1.15-1.35	N(M)	
ST272B-50-250W-XXWC	250	5	DC	10	1.15-1.35	N(F)	
ST271B-50-300W-XX	300	10	DC	4	1.15-1.40	N(M)	
ST271B-50-300W-XXG	300	1	DC	18	1.30-1.50	N(M)	
ST271B-50-300W-XXW	300	5	DC	18	1.15-1.70	N(M)	
ST271B-50-400W-XX	400	10	DC	4	1.15-1.45	N(M)	
ST271B-50-400W-XXW	400	5	DC	10	1.15-1.50	N(M)	
ST271B-50-500W-XX	500	10	DC	4	1.15-1.45	N(M)	
ST271B-50-500W-XXW	500	5	DC	10	1.15-1.55	N(M)	
ST271B-50-800W-XX	800	10	DC	4	1.20-1.45	N(M)	
ST272B-50-1KW-XXW	1000	5	DC	8	1.15-1.55	N(F)	
ST272B-50-1KW-XXG	1000	10	DC	4	1.20-1.50	N(F)	
ST272B-50-1.5KW-XXG	1500	10	DC	4	1.20-1.75	N(F)	
ST272B-50-2KW-XXG	2000	10	DC	4	1.20-1.75	N(F)	
ST272B-50-1KW-02	1000	50	DC	2	1.3	N(F)	
ST272B-50-1KW-02B	1000	50	DC	2	1.3	N(F)	
ST272B-50-2KW-02	2000	50	DC	2	1.3	N(F)	
ST272B-50-2KW-02B	2000	50	DC	2	1.3	N(F)	
ST282B-50-3KW-02	3000	50	DC	2	1.3	7/16(F)	
ST282B-50-5KW-01	5000	100	DC	1	1.4	7/16(F)	
ST282B-50-10KW-01	10000	100	DC	1	1.4	7/16(F)	
ST741B-75-1W-XX	1	0.5	DC	3	1.10-1.20	75ohm BNC(M)	
ST761B-75-2W-XX	2	0.5	DC	3	1.10-1.20	75ohm N(M)	
ST761B-75-5W-XX	5	0.5	DC	3	1.10-1.20	75ohm N(M)	
ST471B-50-10W-XX	10	1	DC	6	1.20-1.25	4.3-10(M)	
ST471B-50-25W-XX	25	1	DC	6	1.20-1.25	4.3-10(M)	
ST471B-50-50W-XX	50	5	DC	8	1.15-1.30	4.3-10(M)	
ST471B-50-100W-XX	100	5	DC	4	1.20-1.25	4.3-10(M)	
ST471B-50-100W-XXW	100	5	DC	6	1.20-1.30	4.3-10(M)	

Coaxial Fixed Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST471B-50-150W-XXW	150	5	DC	6	1.20-1.30	4.3-10(M)	
ST471B-50-200W-XXW	200	5	DC	6	1.20-1.30	4.3-10(M)	
ST301B-50-1W-XX	1	0.25	DC	6	1.15-1.20	QMA(M)	

*** Please contact with us if you can't find the right products in the list, Customization is available**

Inset Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
SNT18XB-50-5W-18	5	/	DC	18	1.3	SMA	
SNT39XD-50-5W-26	5	/	DC	26.5	1.3	3.5mm	
SNT18XB-50-10W-18	10	/	DC	18	1.3	SMA	
SNT39XD-50-10W-26	10	/	DC	26.5	1.3	3.5mm	
SNT18XB-50-20W-18	20	/	DC	18	1.3	SMA	
SNT39XD-50-20W-26	20	/	DC	26.5	1.3	3.5mm	
SNT26XB-50-20W-XX	20	/	DC	18	1.25	TNC	
SNT27XB-50-20W-XX	20	/	DC	18	1.25	N	
SNT18XB-50-30W-18	30	/	DC	18	1.3	SMA	
SNT39XD-50-30W-26	30	/	DC	26.5	1.3	3.5mm	
SNT26XB-50-30W-XX	30	/	DC	18	1.25	TNC	
SNT27XB-50-30W-XX	30	/	DC	18	1.25	N	
SNT18XB-50-50W-18	50	/	DC	18	1.35	SMA	
SNT39XD-50-50W-26	50	/	DC	26	1.3	3.5mm	
SNT26XB-50-50W-XX	50	/	DC	18	1.35	TNC	
SNT27XB-50-50W-XX	50	/	DC	18	1.35	N	
SNT271B-50-50W-XXW	50	10	DC	18	1.10-1.55	N(M)	
SNT271B-50-60W-XXW	60	10	DC	18	1.10-1.55	N(M)	
SNT271B-50-75W-XXW	75	10	DC	18	1.10-1.55	N(M)	
SNT271B-50-150W-XXW	150	10	DC	10	1.10-1.35	N(M)	
SNT271B-50-200W-04W	200	10	DC	4	1.2	N(M)	
SNT271B-50-50W-XXWN	50	10	DC	18	1.20-1.55	N(M)	
SNT271B-50-100W-XXWN	100	10	DC	18	1.20-1.55	N(M)	
SNT271B-50-200W-XXWN	200	10	DC	10	1.25-1.40	N(M)	
SNT271B-50-300W-XXWN	300	10	DC	10	1.25-1.40	N(M)	
SNT271B-50-50W-XXN	50	10	DC	4	1.15-1.30	N(M)	
SNT271B-50-100W-XXN	100	10	DC	4	1.15-1.30	N(M)	
SNT271B-50-200W-XXN	200	10	DC	4	1.15-1.40	N(M)	
SNT271B-50-250W-XXN	250	10	DC	4	1.15-1.40	N(M)	
SNT271B-50-300W-XXN	300	10	DC	4	1.15-1.40	N(M)	

Waterproof Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST281B-50-2W-03F	2	0.5	DC	3	1.1	7/16(M)	
ST281B-50-5W-03F	5	0.5	DC	3	1.1	7/16(M)	
ST271B-50-5W-XXF	5	0.5	DC	4	1.10-1.20	N(M)	
ST271B-50-25W-XXF	25	1	DC	4	1.15-1.25	N(M)	
ST271B-50-30W-XXF	30	1	DC	4	1.15-1.25	N(M)	
ST271B-50-50W-XXF	50	1	DC	4	1.15-1.25	N(M)	
ST281B-50-80W-XXF	80	1	DC	4	1.10-1.20	7/16(M)	
ST281B-50-100W-XXF	100	5	DC	4	1.10-1.20	7/16(M)	

Low PIM Termination

www.sainty-tech.com

Part Number	Average Power(W)	Peak Power(KW)	Low Freq. (GHz)	High Freq. (GHz)	Max VSWR	Connector Type	Datasheet
ST271M-50-2W-03LIM	2	0.5	DC	3	1.15	N(M)	
ST271M-50-5W-03LIM	5	0.5	DC	3	1.15	N(M)	
ST271M-50-10W-03LIM	10	1	DC	3	1.2	N(M)	
ST271M-50-25W-03LIM	25	1	DC	3	1.2	N(M)	
ST271M-50-50W-03LIM	50	1	DC	3	1.1	N(M)	
ST271M-50-100W-03LIM	100	10	DC	3	1.2	N(M)	
ST271M-50-300W-03LIM	300	10	DC	3	1.35	N(M)	



CONTACT US

-  Address: Buliding 3-801,Zijin R&D Center,No.89 Shengli Road,Jiangning,Nanjing 211100,China
-  Tel: +86 (25) 52635773
-  Fax: +86 (25) 52632557
-  Email: sales@sainty-tech.com
-  Website: www.sainty-tech.com