




Electrical Specification

Parameter	Specification	Unit
Center Frequency	2355	MHz
Bandwidth (BW)	$F_0 \pm 5[2350 \sim 2360]$	MHz
Insertion Loss in BW	2.0 max.	dB
Ripple in BW	0.2 max.	dB
Return Loss in BW	17 min.	dB
Attenuation (Absolute Value)	40 min.@727~757MHz	dB
	35 min.@862~894MHz	
	35 min.@1930~1995MHz	
	30 min.@2110~2155MHz	
	25 min.@2550~2700MHz	
	35 min.@2700~3000MHz	
Impedance	50	ohm
Input Power	3 max.	W
Operating Temperature	-40 to +85	°C

Outline Drawing

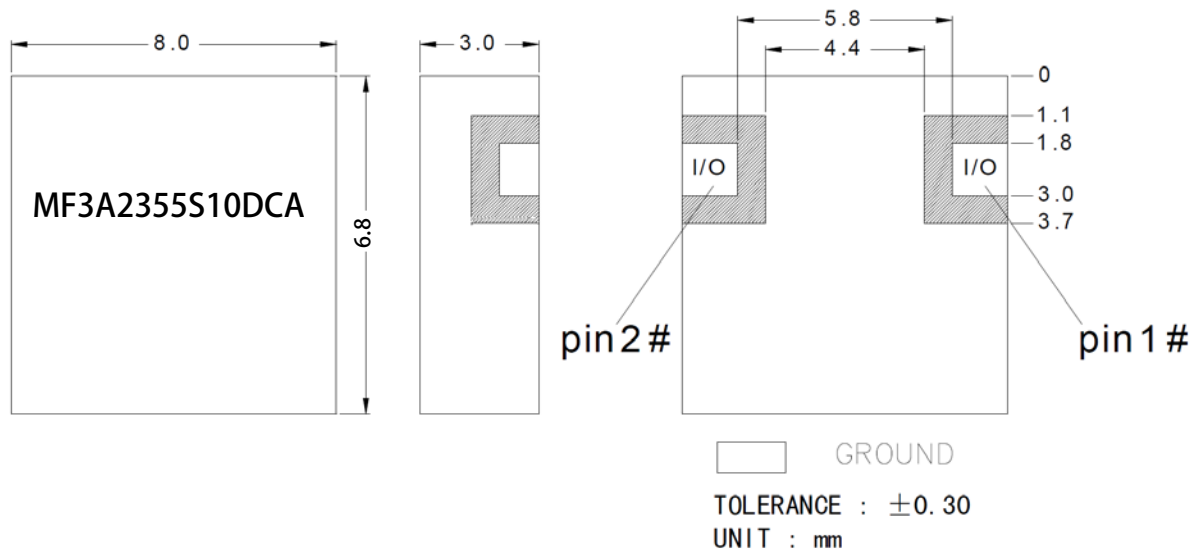


Recommended PCB Layout

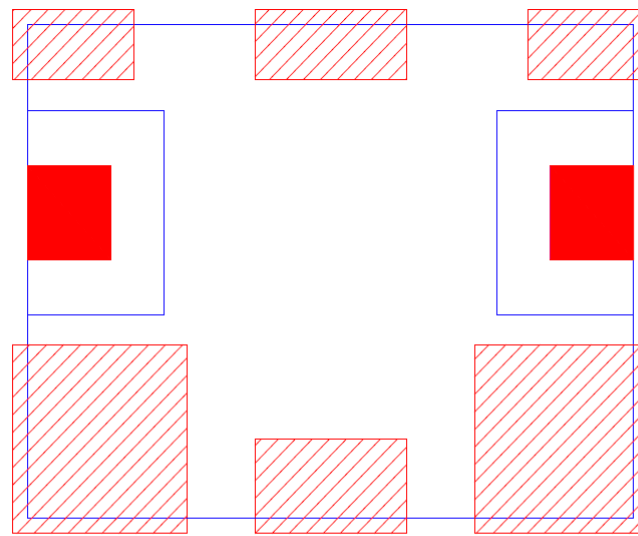


Remarks: Recommend to use silver-containing solder paste

Application Instructions:



1. Recommended Soldering Temperature
 - a. Containing Pb Soldering,
Recommend the solder paste of melting points 183°C, soldering temperature won't exceed 230°C. Refer to the below reflow soldering profile.

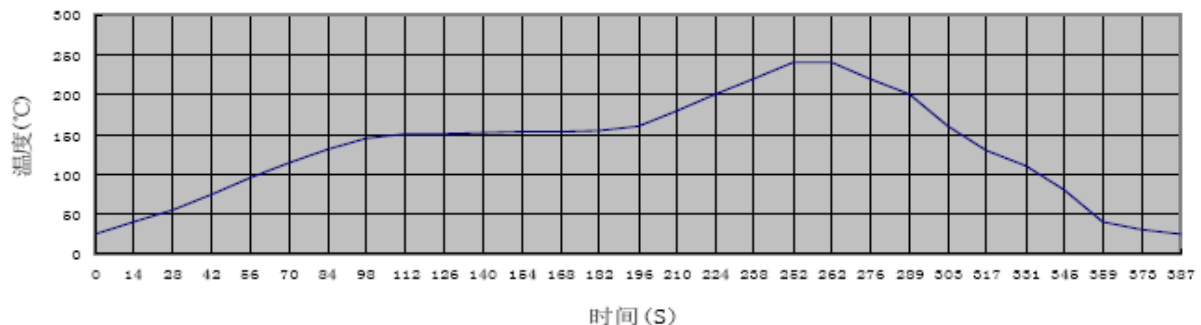


- b. Pb-free soldering
Recommend the solder paste of melting point 217°C, soldering temperature won't exceed 260°C. Refer to the below reflow soldering profile.

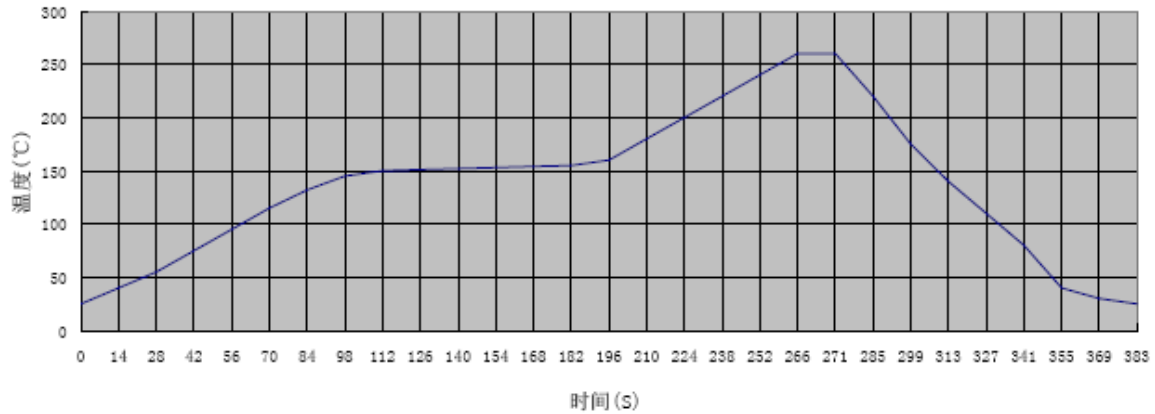

- PCB layout for soldering the filter should be designed in grid pattern. Refer to recommended PCB Layout for more details. Soldering Area is 50%-70% of ground area of this filter.

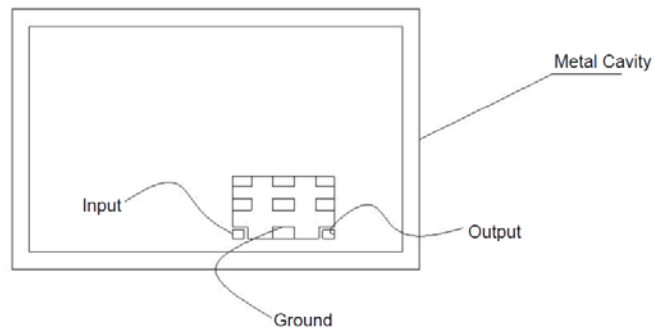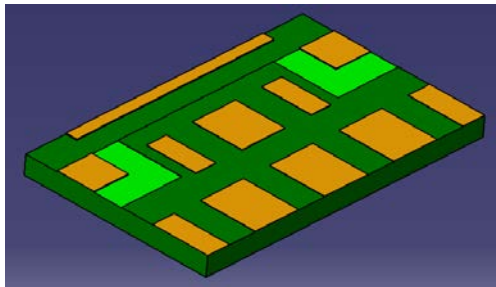

- This filter should be soldered 2mm (at least) away from mental cavity, in order to avoid degrading filter's performance by mental cavity. Refer to the below figure.

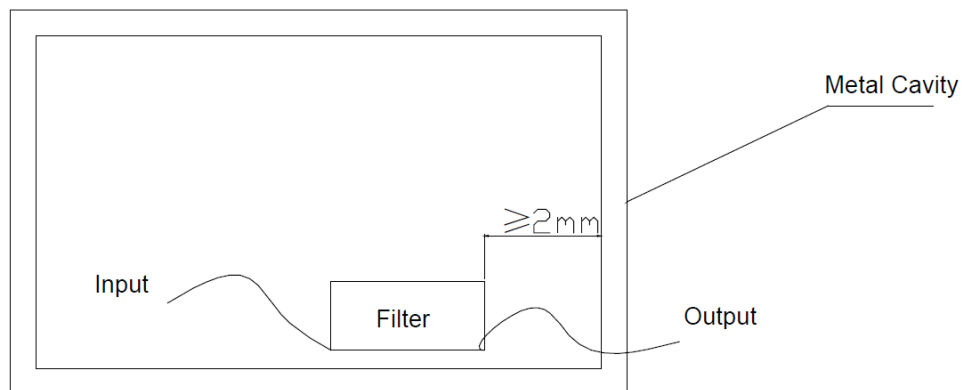

- It would achieve better performance that the top of the filter is grounded too.
- Mounting screws around the filter should be 1cm away from the filter.
- To avoid PCB transformation during mounting the filter.
- If customer will solder PCB of the filter on Aluminum plate, please contact us directly.