



# HL952x Series Termination (DC to 110 GHz)

#### **PRODUCT SUMMARY**

The HL952x series are ultra-broadband 50 Ω load terminations.

These devices are typically used to provide a matched (dummy) load on an unused port to prevent unwanted reflections.

**Typical Applications:** 

- 5G Wireless
- Test & Measurement
- Radar Systems
- Military and Aerospace

#### **MODELS & OPTIONS**

The following models are available:

HL9524, 40 GHz HL9525, 50 GHz HL9527, 70 GHz HL9529, 110 GHz


The following options are available:

-J, jack/female

-P, plug/male


### Features and Technical Specifications<sup>1</sup> (HL9529 shown)

Bandwidth	DC to 110 GHz	
Return Loss	15 dB, DC < f ≤ 90 GHz 10 dB, 90 GHz < f ≤ 110 GHz See <i>figure below</i>	HYPERLABS 50Ω LOAD HL9529
Input Power	20 dBm (24 dBm max) <sup>2</sup>	
Rise Time (10-90%)	3 ps, all options	
Connectors	1.0 mm, jack/female (optJ) 1.0 mm, plug/male (optP)	HL9529, optJ
Temperature Limits	-40° to +50° C, case	
RoHS Compliant	Yes, assembled with lead-free solder	
REACH Compliant	Yes	₹ 50Ω
Warranty	1 year, see website	



2 - Long-term power handling testing is ongoing. The preliminary specification is 20 dBm.

HL952x Schematic and Port Assignments

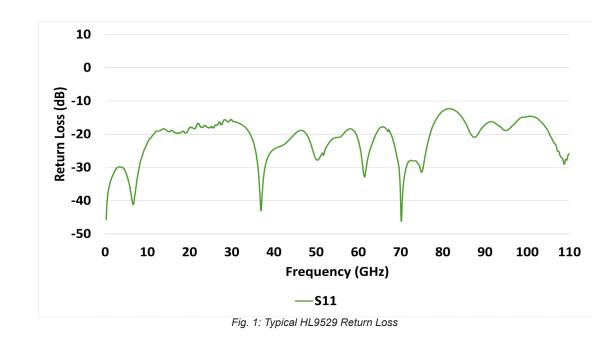



## HL952x Full Specifications

Parameter	HL9524	HL9525	HL9527	HL9529	Comment		
Upper Frequency Limit	> 40 GHz	> 50 GHz	> 70 GHz	> 110 GHz	3 dB roll-off point, relative to nominal insertion loss		
Lower Frequency Limit							
Input Power		Preliminary					
Return Loss See Figs. 1-2	25 dB	20 dB	20 dB	15 dB, f ≤ 90 GHz 10 dB, 90 GHz < f ≤ 110 GHz	Typical		
Rise Time	8.75 ps	7 ps	5 ps	3 ps			
DC Resistance							
Impedance							
Connectors	2.92 mm	2.4 mm	1.85 mm	1.0 mm			
Dimensions (W x D x H)	0.737" x 0.377" x 0.377" 18.7 x 9.57 x 9.57 mm	0.78" x 0.377" x 0.377" 19.8 x 9.57 x 9.57 mm	0.80" x 0.377" x 0.377" 20.3 x 9.57 x 9.57 mm	0.737" x 0.377" x 0.377" 18.7 x 9.57 x 9.57 mm	Package including connectors		
Weight							
Operating Tempera- ture		Case temperature					
RoHS Compliant	Yes, assembled with lead-free solder						
REACH Compliant	Yes						
Warranty	1 year, repair or replacement; see website for details						

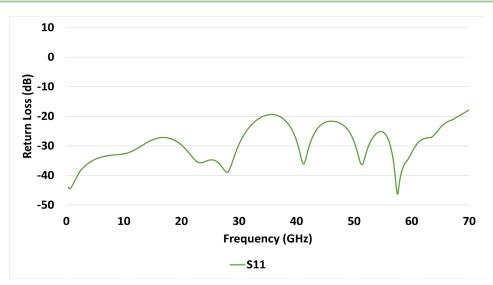


Fig. 2: Typical HL9527 Return Loss

中国区(含香港)代理 南京舜特科通信技术有限公司

地址:南京市江宁区胜利路89号紫金研创中心5号楼1004 电话/传真:025-52635773/52632557



### **HL9529** Dimensional Drawing

*Figure 3* shows a mechanical drawing of an HL9529-J. Unless otherwise noted, all units are in inches. See page 2 for full dimensions.

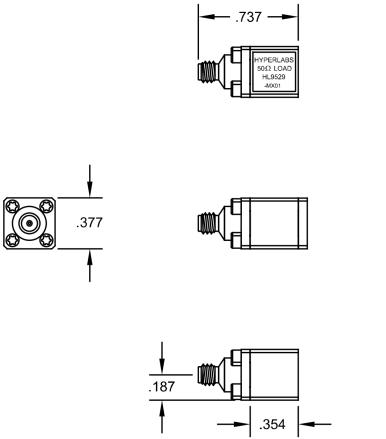


Fig 3: HL9529 Mechanical Drawing

中国区(含香港)代理 南京舜特科通信技术有限公司

地址:南京市江宁区胜利路89号紫金研创中心5号楼1004 电话/传真:025-52635773/52632557