


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.92mm coaxial fixed attenuators' average power 2W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

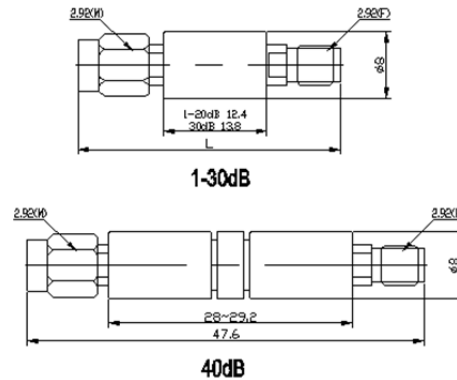

MECHANICAL SPECIFICATIONS		
Connectors	Stainless Steel Passivated	
Male Pin	Brass Gold Plated	
Female Pin	Beryllium Copper Gold Plated	
Housing	Aluminum	
Temp Range	-55°C ~ +125°C	
Dimensions	Ø8×L mm	≤20dB L=31.4
		≥30dB L=33
		40dB L=47.6
Weight	≤30dB:5g; 40dB:10g	

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		1-9	10-19	20-30	40	
SAT36D02XX26	DC-26.5	±0.8	±0.8	-0.8/+1.0	±1.0	1.25
SAT36D02XX32	DC-32	±0.8	±0.8	±1.0	±1.5	1.30
SAT36D02XX40	DC-40	±1.0	±1.0	-1.0/+1.5	-1.0/+2.0	1.35 1.40(40dB)

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 2W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C

PEAK POWER: 0.2KW (5μs pulse width with 1% duty cycle)

CONNECTOR TYPE: 2.92mm

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.