


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.4mm coaxial fixed attenuators' average power 5W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

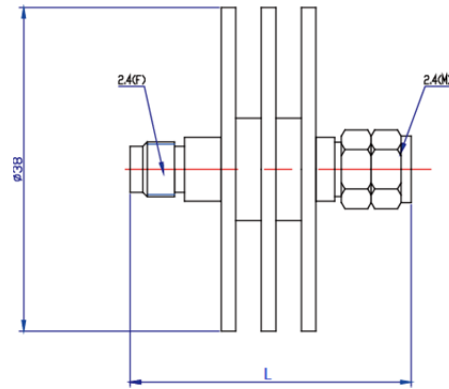

MECHANICAL SPECIFICATIONS		
Connectors	Stainless Steel Passivated	
Male Pin	Brass Gold Plated	
Female Pin	Beryllium Copper Gold Plated	
Housing	Aluminum	
Temp Range	-55°C ~ +125°C	
Dimensions	Ø38×Lmm	≤20dB L=31.4
		30dB L=33
		40dB L=47.6
Weight	20g	

RoHS Compliant: Yes

## ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)					Max VSWR
		1-9	10	20	30	40	
SAT38D05XX26	DC-26.5	-0.8/+0.5	±0.6	±0.8	-0.8/+1.0	-1.2/+1.0	1.25
SAT38D05XX32	DC-32	±1.0	±1.0	±1.0	±1.4	±1.5	1.30
SAT38D05XX40	DC-40	±1.0	±1.0	-1.0/+1.5	±1.5	-1.0/+2.0	1.35 1.40(40dB)

Note: XX refer to attenuation value in dB

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 5W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C

**PEAK POWER:** 0.2KW (5μs pulse width with 2.5% duty cycle)

**CONNECTOR TYPE:** 2.4mm

## Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.