


### Electrical Specifications ( $T_A = +25^\circ\text{C}$ )

| Parameter             | Specification     | Unit             |
|-----------------------|-------------------|------------------|
| Frequency             | 1930-1990         | MHz              |
| IMD                   | -75               | dBc              |
| IMD Test Requirements | 2×45dBm, 5MHz gap | -                |
| Insertion Loss        | $\leq 0.25$       | dB               |
| Isolation             | $\geq 23$         | dB               |
| VSWR                  | $\leq 1.2:1$      | --               |
| Operating Temperature | -40 to +85        | $^\circ\text{C}$ |
| Load Power            | 100               | W                |
| Connector Type        | TAB               |                  |

### Outline Drawing

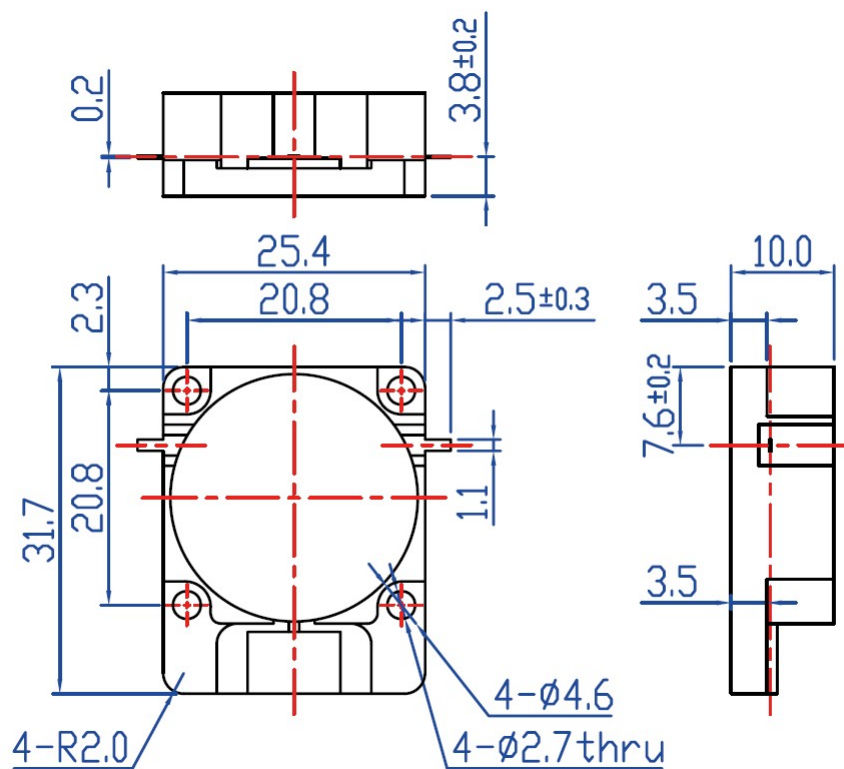

Unit: mm