

Performance

- Technology: 0.35um Power GaN HEMT
- Frequency: 2.5GHz
- Typical Pout : 49dBm(CW)
- Typical Gain: 13dB
- Typical PAE: 63%
- Bias: 28V/-4~-2V
- Impedance: 50Ω
- Package: Metal Ceramic




Electrical Specifications ($T_A=25^{\circ}\text{C}$, $V_d=28\text{V}$, $I_d\approx 2.4\text{A}$, $\text{Pin}=34.5\text{dBm}$, CW, F: 2.494~2.496GHz)


Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	-	49	-	dBm
Gp	Power Gain	-	13	-	dB
η_{add}	Power Added Efficiency	-	63	-	%
ΔG_p	Gain Flatness	-0.8	-	+0.8	dB
Rth	Thermal Resistance	-	-	1.51	$^{\circ}\text{C/W}$

Test Curves

Pout&Freq. @ Different Temp.

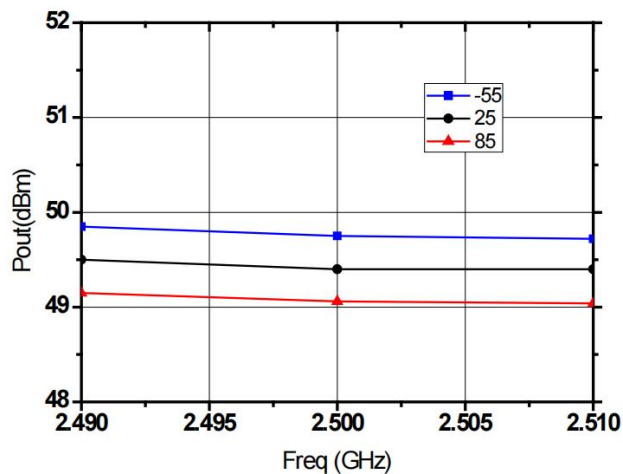


PAE&Freq. @ Different Temp.

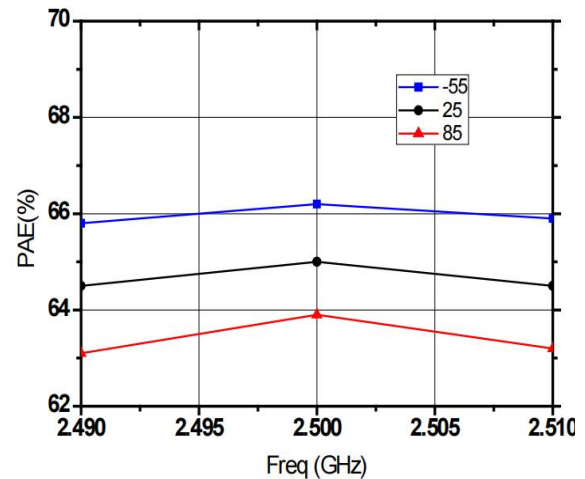


Absolute Max Ratings (T_A=25°C)

Symbol	Parameter	Value	Remark
V _d	Drain Voltage	36V	
V _g	Grid Voltage	-5V	
P _d	DC Dissipation	100W	25°C
T _{ch}	Channel Temperature	175°C	【1】
T _m	Mounting Temperature	300°C	1 min, N ₂ Protection
T _{stg}	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

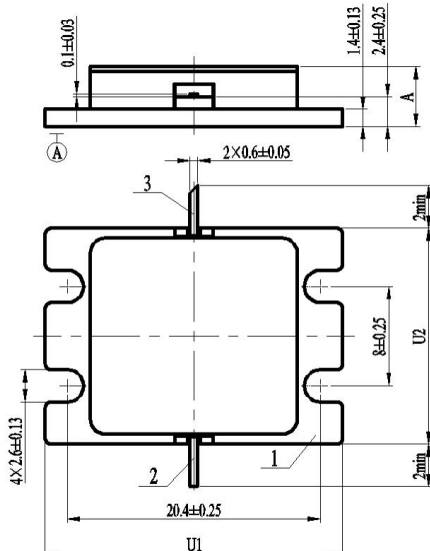Outline Drawing	Dimension Symbol														
	<table><tr><th rowspan="2">Symbol</th><th colspan="2">Value (unit: mm)</th></tr><tr><th>Min.</th><th>Max.</th></tr><tr><td>U1</td><td>23.80</td><td>24.20</td></tr><tr><td>U2</td><td>17.20</td><td>17.60</td></tr><tr><td>A</td><td>-</td><td>5.2</td></tr></table>	Symbol	Value (unit: mm)		Min.	Max.	U1	23.80	24.20	U2	17.20	17.60	A	-	5.2
Symbol	Value (unit: mm)														
	Min.	Max.													
U1	23.80	24.20													
U2	17.20	17.60													
A	-	5.2													

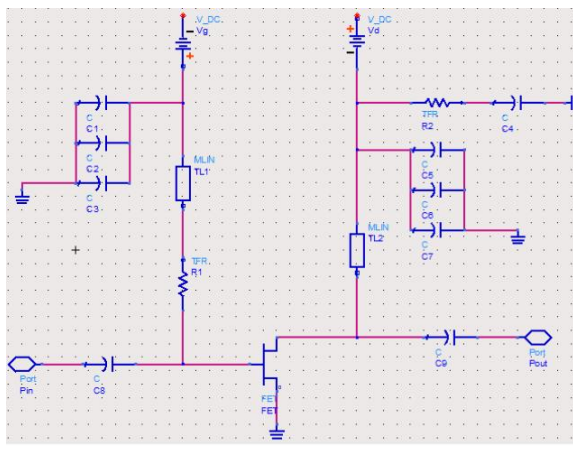Application Circuit																											
	<table> <tr> <th>Parameter</th><th>Symbol</th><th>Value</th><th>Unit</th></tr> <tr> <td>Filter capacitor</td><td>C1,C2,C3, C4,C5,C6,C7</td><td>1000</td><td>pF</td></tr> <tr> <td>DC isolation capacitance</td><td>C8,C9</td><td>4.7</td><td>pF</td></tr> <tr> <td>Stabilizing resistance</td><td>R1</td><td>15</td><td>Ω</td></tr> <tr> <td>Resistance</td><td>R2</td><td>50</td><td>Ω</td></tr> <tr> <td>Microstrip line</td><td>TL1,TL2</td><td>λ/4</td><td>-</td></tr> </table>	Parameter	Symbol	Value	Unit	Filter capacitor	C1,C2,C3, C4,C5,C6,C7	1000	pF	DC isolation capacitance	C8,C9	4.7	pF	Stabilizing resistance	R1	15	Ω	Resistance	R2	50	Ω	Microstrip line	TL1,TL2	λ/4	-		
Parameter	Symbol	Value	Unit																								
Filter capacitor	C1,C2,C3, C4,C5,C6,C7	1000	pF																								
DC isolation capacitance	C8,C9	4.7	pF																								
Stabilizing resistance	R1	15	Ω																								
Resistance	R2	50	Ω																								
Microstrip line	TL1,TL2	λ/4	-																								

Note:

- (1) This product is an internal matching tube, with input and output impedance values of 50 ohms;
- (2) The power-on sequence shall be in strict accordance with the sequence of applying negative power first and then positive power. When power-off, the leakage voltage shall be reduced first and then the grid voltage shall be reduced;
- (3) This product is a high-power device. Pay attention to heat dissipation during use. The higher the shell temperature is, the shorter the service life is. The service temperature should not be higher than 80 °C;
- (4) This product is an electrostatic sensitive device. It needs to pay attention to electrostatic protection during storage and use, and it needs to be grounded well during use.