


Performance

- Frequency: 1.2~1.4GHz
- Insertion loss: 0.2dB
- Isolation: 38dB
- Input P-0.3: 48.5dBm
- Input/Output VSWR: 1.3:1
- Switching Time: 20ns
- Control Mode: 0/-28V
- Voltage control reflective switch
- Chip size: 1.3*1.15*0.08mm

Function Diagram

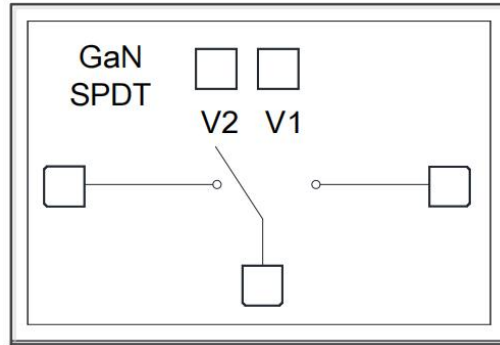

Electrical Specifications (Ta=+25°C, V1~V2=0V/-28V, F=1.2~1.4GHz)

Symbol	Parameter	Min.	Typ.	Max.	Unit
Li	Insertion Loss	-	0.2	-	dB
ISO	Isolation	-	38	-	dB
VSWR	Input / Output VSWR	-	1.3	-	-


Absolute Maximum Ratings (Ta=+25°C)

Symbol	Parameter	Value	Notes
V1,2	Control Voltage	-60V	
Pcw	Input Continuous Wave Power	49.5dBm	
Tch	Channel Temperature	225°C	
T	Sintering Temperature	310°C	30s, N2 protection
Tstg	Storage Temperature	-65~150°C	


Exceed any of above listed ratings may cause permanent damage.

Test Curves (Ta=+25°C, (V1,2=-28V))


VSWR

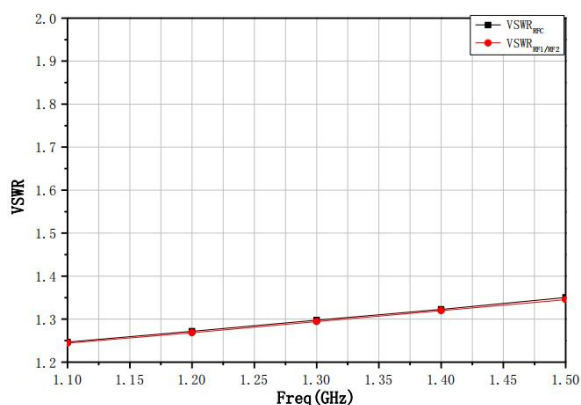



Insertion Loss @ Different temperature

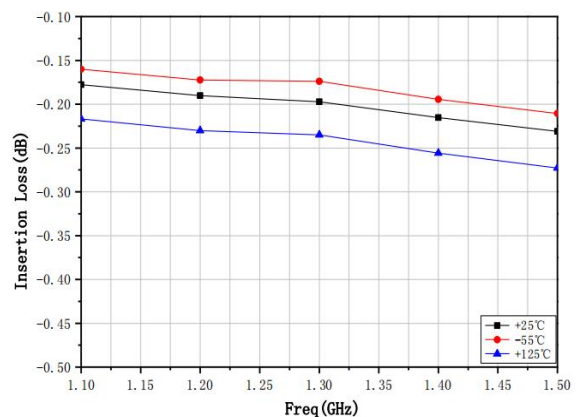

Isolation @ Different temperature

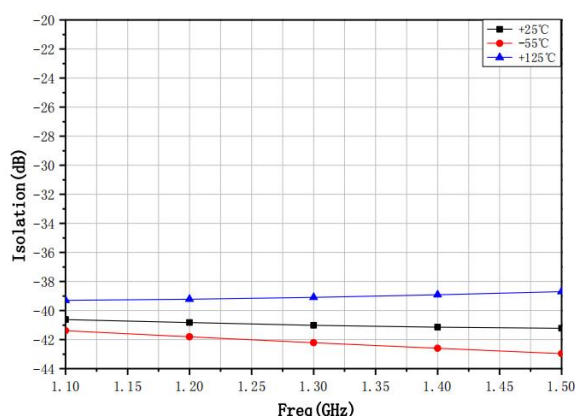

Input Power (Y axis is normalized value of I.L)

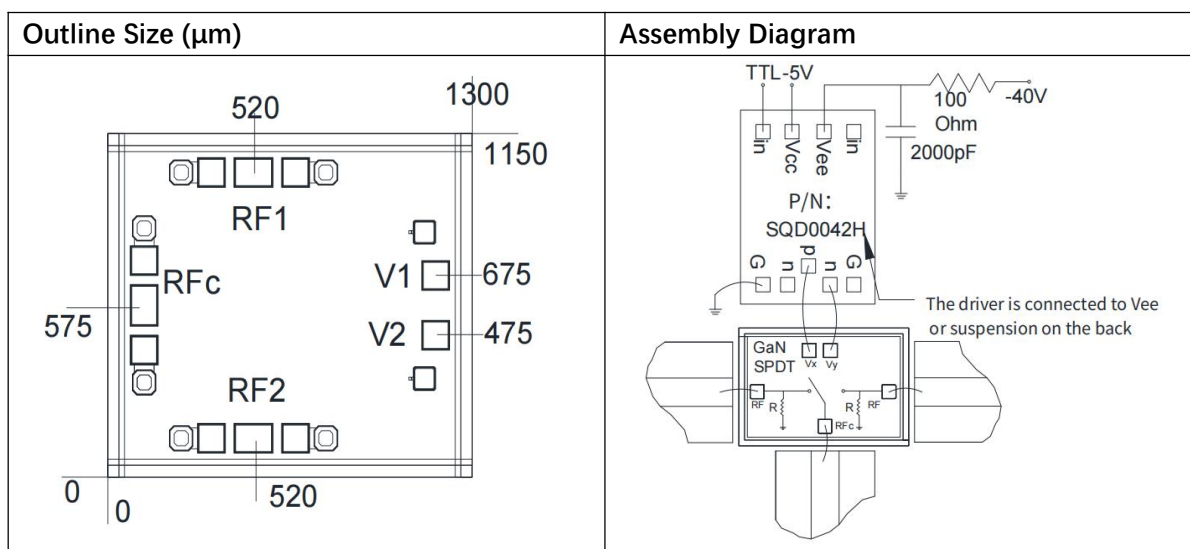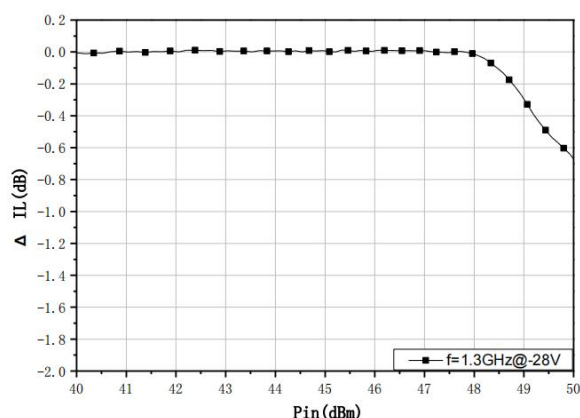

Note: Recommended single wire length for RF port is >0.8mm, <1.2mm.
Dual wires length is >1mm, <1.5mm.

PIN Definition

PIN	Description
RF1、RF2	RF ports, 50Ω, no block capacitor
RFc	RF common ports, 50Ω, no block capacitor
V1、V2	Control Ports
GND	Bottom must be grounded

Truth Table

V1	V2	RFc→RF1	RFc→RF2
1	0	OFF	ON
0	1	ON	OFF

Note: 1. Low level "0" is -28V~-40V, High level "1" is 0V~0.5V
2. Performance is same under condition of -28V ~ -40V

Note

- a) This product is an electrostatic sensitive device, and anti-static should be paid attention to during use, transportation and operation;
- b) It is recommended to use 80/20 gold tin for sintering, the sintering temperature should not exceed 310°C, and the sintering time should be as short as possible, not exceeding 30 seconds;
- c) It is recommended to use 2 bonding wires (gold wire with a diameter of 25 μm) at the input and output ends. The length of the bonding wire is greater than 0.8 mm and less than 1.2 mm; the double wire is more than 1 mm and less than 1.5 mm.
- d) The hydrogen resistance of this product is not less than 20000ppm. It is recommended to pay attention to controlling the hydrogen concentration in the sealed cavity when using it.