


Performance

- Technology: 0.25um GaN FET
- Frequency: 0.5~2GHz
- Insertion loss: 0.6dB
- Isolation: 35dB
- Input P-0.3: 54dBm
- Input/Output VSWR: 1.4:1
- Switching Time: 20ns
- Control Mode: 0/-40V
- Voltage control reflective switch
- Chip size: 1.95*1.25*0.08mm

Function Diagram

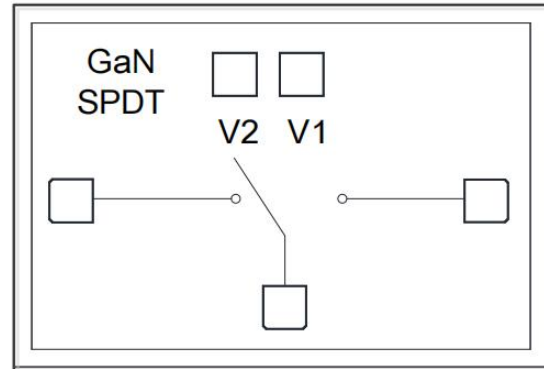

Electrical Specifications (Ta=+25°C, V1~V2=0V/-40V, F=0.5~2GHz)



Symbol	Parameter	Min.	Typ.	Max.	Unit
Li	Insertion Loss	-	0.6	-	dB
ISO	Isolation	-	35	-	dB
VSWR	Input / Output VSWR	-	1.4	-	-

Absolute Maximum Ratings (Ta=+25°C)


Symbol	Parameter	Value	Notes
V1,2	Control Voltage	-60V	
Pcw	Input Continuous Wave Power	55dBm	
Tch	Channel Temperature	225°C	
T	Sintering Temperature	310°C	30s, N2 protection
Tstg	Storage Temperature	-55~150°C	

Exceed any of above listed ratings may cause permanent damage.


Test Curves (Ta=+25°C, (V1,2=-40V))

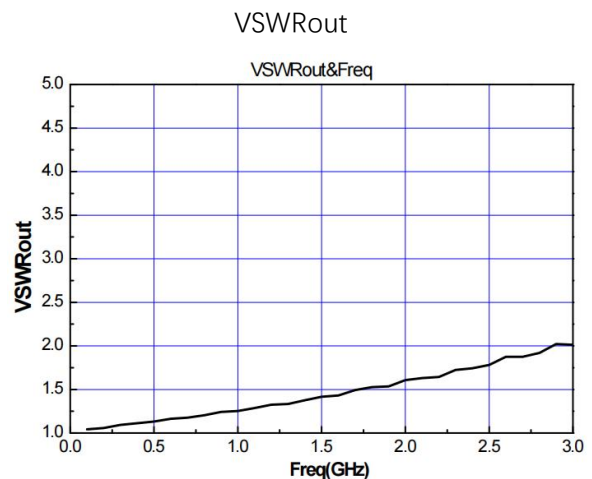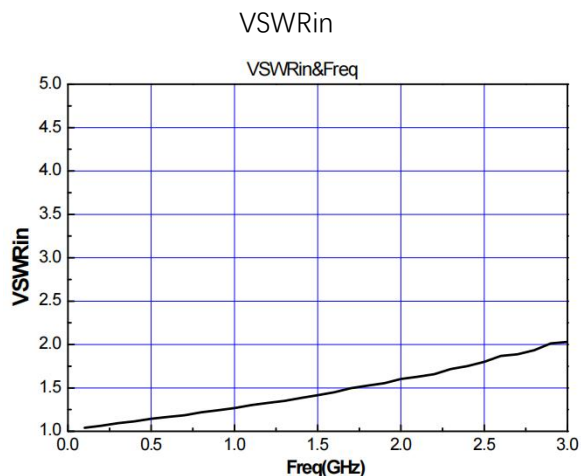



Insertion Loss

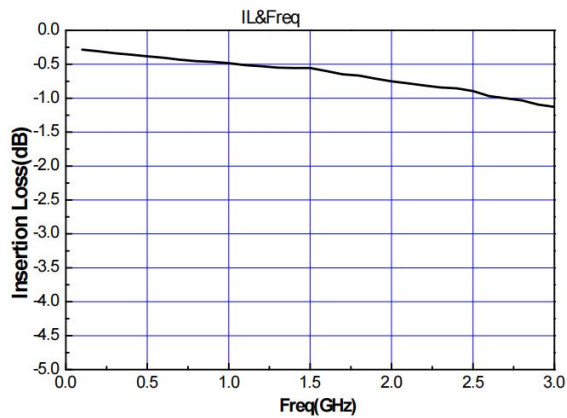

Isolation

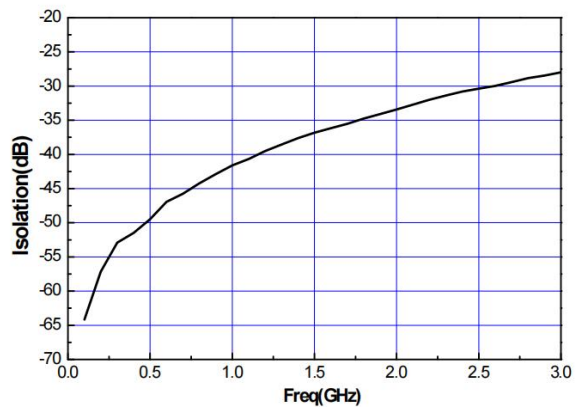

Input Power (Y axis is normalized value of I.L)

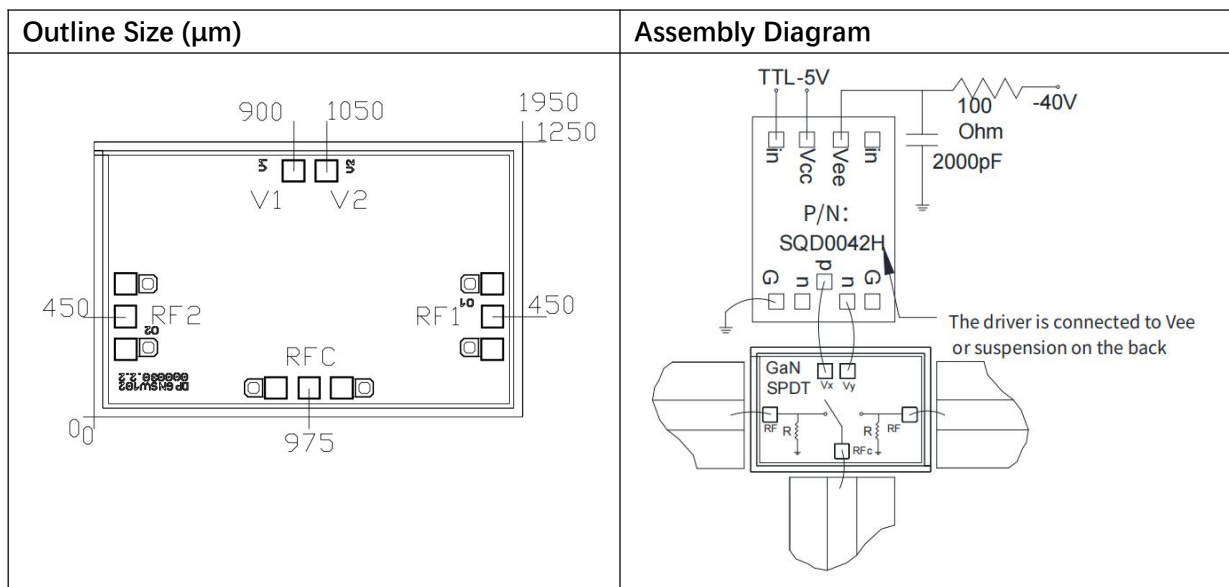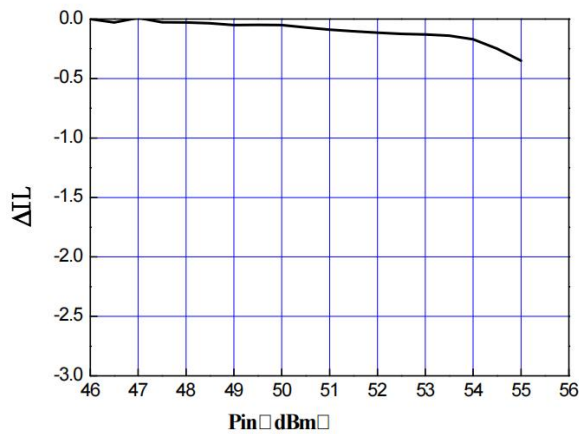

Note: Recommended single wire length for RF port is >0.8mm, <1.2mm.

Dual wires length is >1mm, <1.5mm.

PIN Definition

PIN	Description
RF1、RF2	RF ports, 50Ω
RFc	RF common ports, 50Ω
V1、V2	Control Ports
GND	Bottom must be grounded

Truth Table

V1	V2	RF _c →RF1	RF _c →RF2
1	0	OFF	ON
0	1	ON	OFF

Note: Low level "0" is -28V~-40V, High level "1" is 0V~0.5V