Electrical Specifications(50Ω)


ITEM			Min.	Typ.	Max.	Unit
1	Frequency Range		6.4		8.0	GHz
2	Insertion Loss			2.7	3.5	dB
3	Ripple				1.5	dB
4	Return Loss		12	16		dB
5	Rejection	@DC~5GHz	55	65		dBc
		@5~5.6GHz	50	55		
		@10~11.6GHz	36	50		
6	Power Handling*		1W			
7	Package		SMD			

Remark: The specification with * means that it is guaranteed by design.

Environmental Specifications

1	Operating Temperature	-40℃~+70℃
2	Storage Temperature	-55℃~+85℃

Outline Drawing

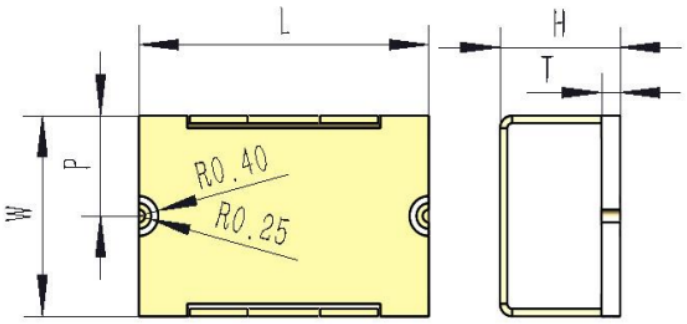

L	W	H	P	T
10	5.5	2.5	2.75	0.381


Unit: mm Tolerance: L&W±0.05mm,H±0.2mm

Remark:


240°C solder paste is used in the device. Pay more attention to the temperature of reflow soldering.

Typical Test Curves


Insertion Loss(GHz/dB)

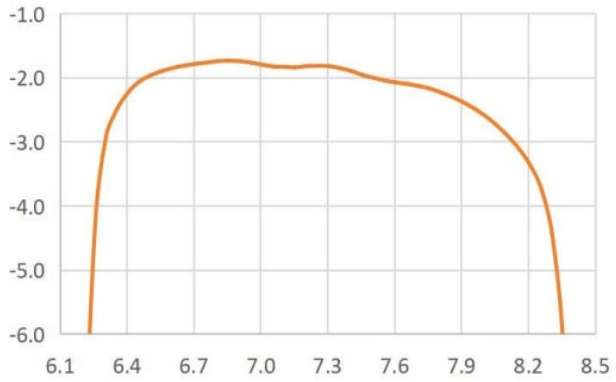

Return Loss(GHz/dB)

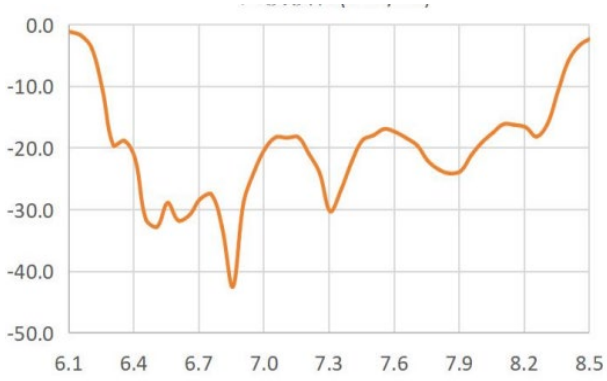

Group Delay(GHz/ns)

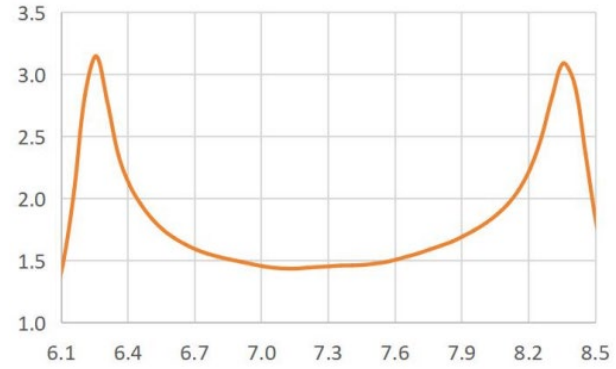

Rejection(GHz/dB)

