Electrical Specifications(50Ω)


ITEM			Min.	Typ.	Max.	Unit
1	Frequency Range		4		6	GHz
2	Insertion Loss			2.4	2.5	dB
3	Ripple				1.5	dB
4	Return Loss		12	15		dB
5	Rejection	@6.4GHz	15	20		dB
		@0.4~2.4GHz&6.8~8.8GHz	45	47		
		@3.2GHz&9~12GHz	30	35		
6	Power Handling*		1W			
7	Package		SMD			

Remark: The specification with * means that it is guaranteed by design.

Environmental Specifications

1	Operating Temperature	-40℃~+70℃
2	Storage Temperature	-55℃~+85℃

Outline Drawing

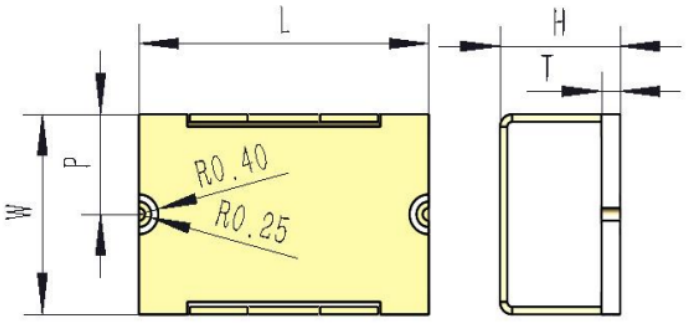

L	W	H	P	T
10	8	3	4	0.381


Unit: mm Tolerance: L&W±0.05mm,H±0.2mm

Remark:


240°C solder paste is used in the device.Pay more attention to the temperature of reflow soldering.

Typical Test Curves


Insertion Loss(GHz/dB)

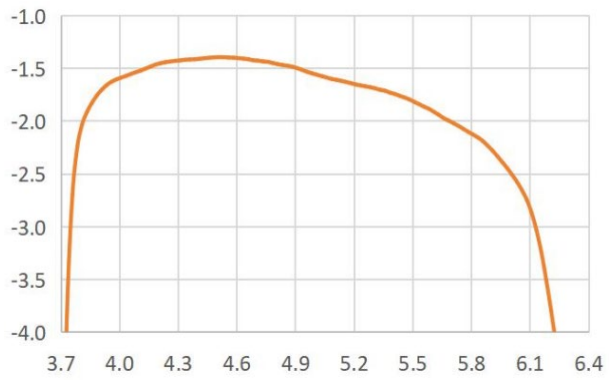

Return Loss(GHz/dB)

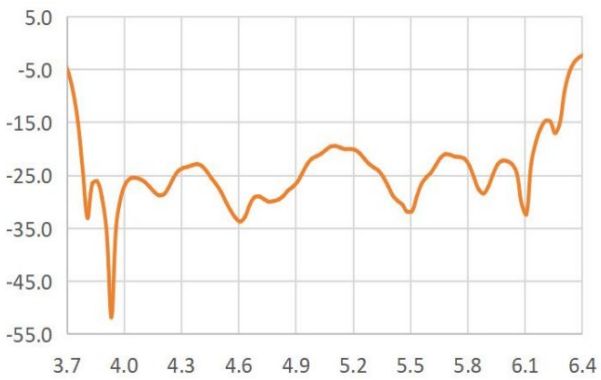

Group Delay(GHz/ns)

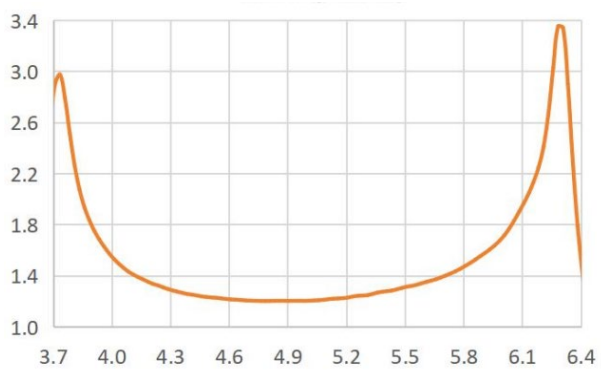

Rejection(GHz/dB)

