

HL9201 Triggerable Impulse Generator (50 ps)

The HL9201 triggerable impulse generator module generates a short positive going output pulse for every positive going transition of the input signal.

Each pulse has a wide spectrum in the frequency domain extending into the Ultra Wide Band (UWB) communication region (1-10 GHz).



官方公众号 立即关注

Features and Technical Specifications

Rise Time	50 ps, typical
Fall Time	50 ps, typical
Pulse Width	70 ps, typical
Output Amplitude	2 V min. into 50 Ω load
Triggering Rate	10 Hz to 50 MHz
Trigger Input	0 to +5 V Schmitt Trigger at +2 V 1 kΩ / 20 pF
Jitter	3 ps RMS max. at input slew rate > 10 mV/ps
Connectors	Input: 1 x BNC jack Output: 1 x SMA jack
Power Supply	Min. +7 V DC, Max. 200 mA from +9 V Adapter (center pin positive)
Temperature	0° to 40° C, operating -10° to +50° C, storage
Dimensions	5.8" x 2.44" x 1.48" 147.3 x 61.9 x 37.6 mm
Weight	7.05 oz., 200 g



Figure 1: HL9201 Triggerable Impulse Generator (50 ps)

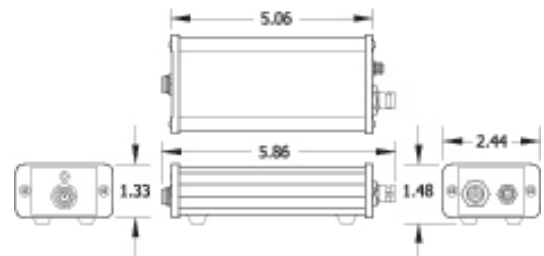


Figure 2: HL9201 dimensional drawing

Deployment Notes

This product is a direct replacement for our discontinued HL9200 Triggerable Impulse Generator, and is suitable for all of the same applications.