


**Specifications**

- Frequency range: 3.22-4.90 GHz
- VSWR: 1.25 Max.
- Attenuation: 10dB
- Power handling: 2 W(CW)
- Waveguide type: WR229
- Flange type: FDP40
- Basis-material: Aluminum
- Inside finish: Chromate conversion
- Outside finish: Anticorrosion black paint
- Length: 200mm
- RoHS Compliant: Yes

**Outline drawing(Unit:mm):**

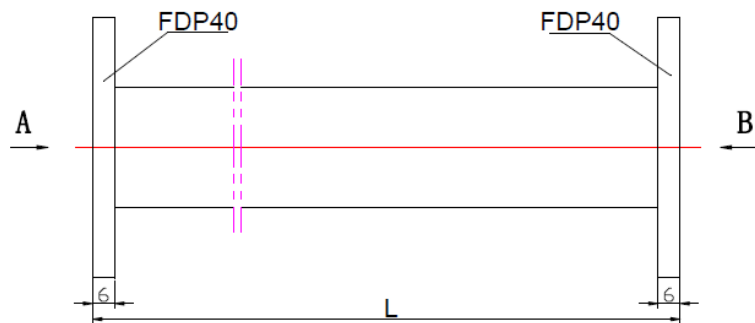

**A , B VIEW**

