


### Performance

- Technology: 0.25um Power GaN HEMT
- Frequency: 1.0~2.0GHz
- Typical Pout : 53dBm
- Typical Gain: 12dB
- Typical PAE: 50%
- Bias: 48V/-2.8V
- Package: Metal Ceramic




### Electrical Specifications (TA=25°C,Vd=48V,Vg=-2.8V,F: 1.0~2.0GHz,PL=100us,D.C=10%)

| Symbol       | Parameter              | Min  | Typical | Max       | Unit |
|--------------|------------------------|------|---------|-----------|------|
| Pout         | Output Power           | -    | 53      | -         | dBm  |
| Gp           | Power Gain             | 12   | -       | -         | dB   |
| $\eta_{add}$ | Power Added Efficiency | -    | 50      | -         | %    |
| $\Delta Gp$  | Gain Flatness          | -0.9 | -       | $\pm 0.9$ | dB   |

### Test Curves


Pout、Eff&Freq.

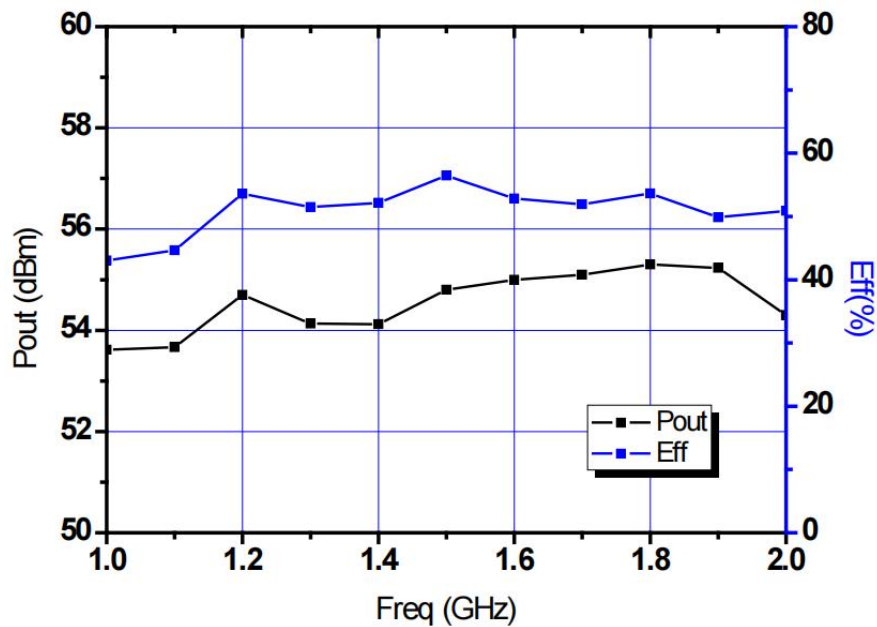

### Absolute Max Ratings (T<sub>A</sub>=25°C)

| Symbol           | Parameter            | Value     | Remark                           |
|------------------|----------------------|-----------|----------------------------------|
| V <sub>d</sub>   | Drain Voltage        | 60V       |                                  |
| V <sub>g</sub>   | Grid Voltage         | -5V       |                                  |
| P <sub>d</sub>   | DC Dissipation       | 250W      | 25°C                             |
| T <sub>ch</sub>  | Channel Temperature  | 225°C     | <b>【1】</b>                       |
| T <sub>m</sub>   | Mounting Temperature | 300°C     | 1 min, N <sub>2</sub> Protection |
| T <sub>stg</sub> | Storage Temperature  | -55~175°C |                                  |

**【1】** Exceeding any one or combination of these limits may cause permanent damage.

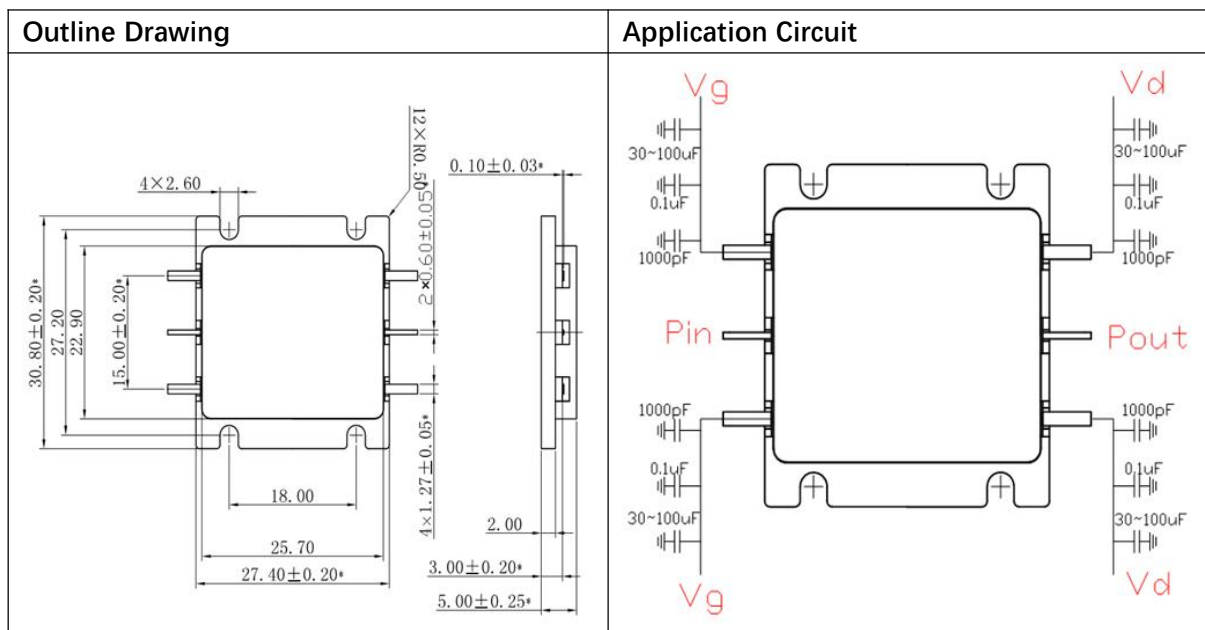

### Note:

- (1) This product is an internal matching tube, with input and output impedance values of 50 ohms;
- (2) Please strictly follow the sequence of applying negative power first and then positive power. When removing power, first decrease the leakage voltage and then decrease the gate voltage;
- (3) This product is a high-power device, and attention should be paid to heat dissipation during use. The higher the shell temperature, the shorter the service life. The use temperature should not be higher than 80 degrees Celsius;
- (4) This product is an electrostatic sensitive device, which requires attention to electrostatic protection during storage and use, and requires good grounding during use;
- (5) The input standing wave ratio is high, and an isolator needs to be connected to the input terminal.