


### Performance

- Technology: 0.25um GaN FET
- Frequency: 5~14GHz
- Insertion loss: 0.9dB
- Isolation: 45dB
- Input P-0.3: 48.5dBm
- Input/Output VSWR: 1.3:1
- Switching Time: 20ns
- Control Mode: 0/-40V
- Voltage control reflective switch
- Chip size: 2.5\*1.5\*0.08mm

### Function Diagram

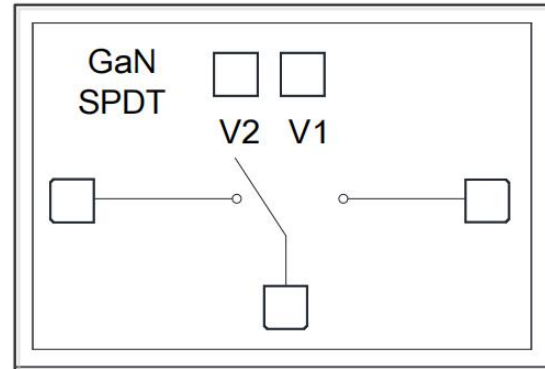

### Electrical Specifications (Ta=+25°C, V1~V2=0V/-40V, F=5~14GHz)


| Symbol | Parameter           | Min. | Typ. | Max. | Unit |
|--------|---------------------|------|------|------|------|
| Li     | Insertion Loss      | -    | 0.9  | -    | dB   |
| ISO    | Isolation           | -    | 45   | -    | dB   |
| VSWR   | Input / Output VSWR | -    | 1.3  | -    | -    |



### Absolute Maximum Ratings (Ta=+25°C)

| Symbol           | Parameter                   | Value     | Notes              |
|------------------|-----------------------------|-----------|--------------------|
| V1,2             | Control Voltage             | -60V      |                    |
| P <sub>cw</sub>  | Input Continuous Wave Power | 49dBm     |                    |
| T <sub>ch</sub>  | Channel Temperature         | 225°C     |                    |
| T                | Sintering Temperature       | 310°C     | 30s, N2 protection |
| T <sub>stg</sub> | Storage Temperature         | -55~150°C |                    |



Exceed any of above listed ratings may cause permanent damage.

### Test Curves (Ta=+25°C, (V<sub>1,2</sub>=-40V))

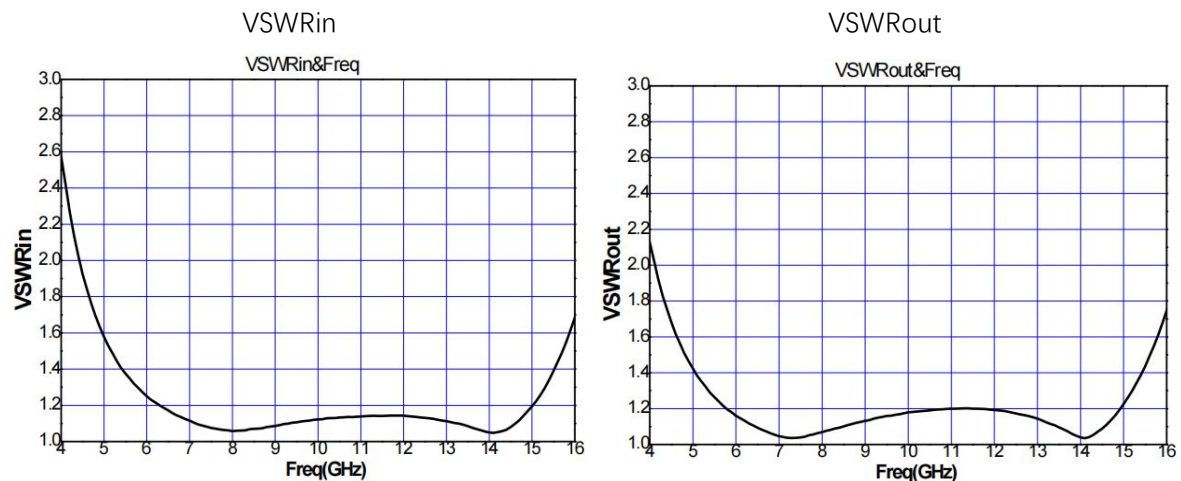

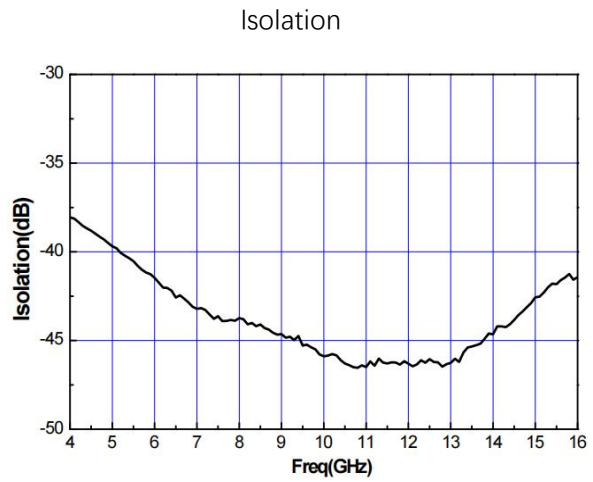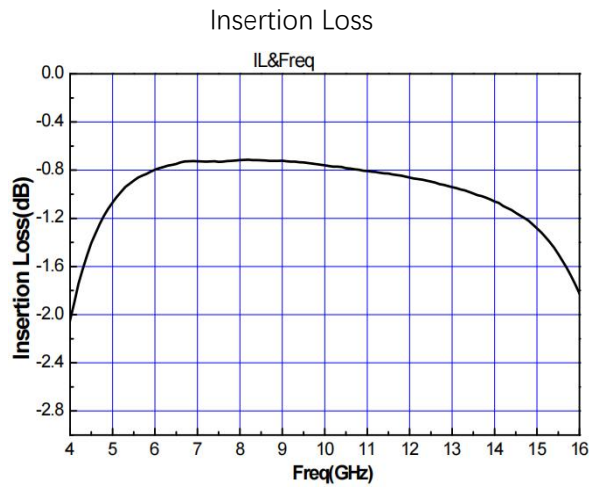

Input Power (Y axis is normalized value of I.L)

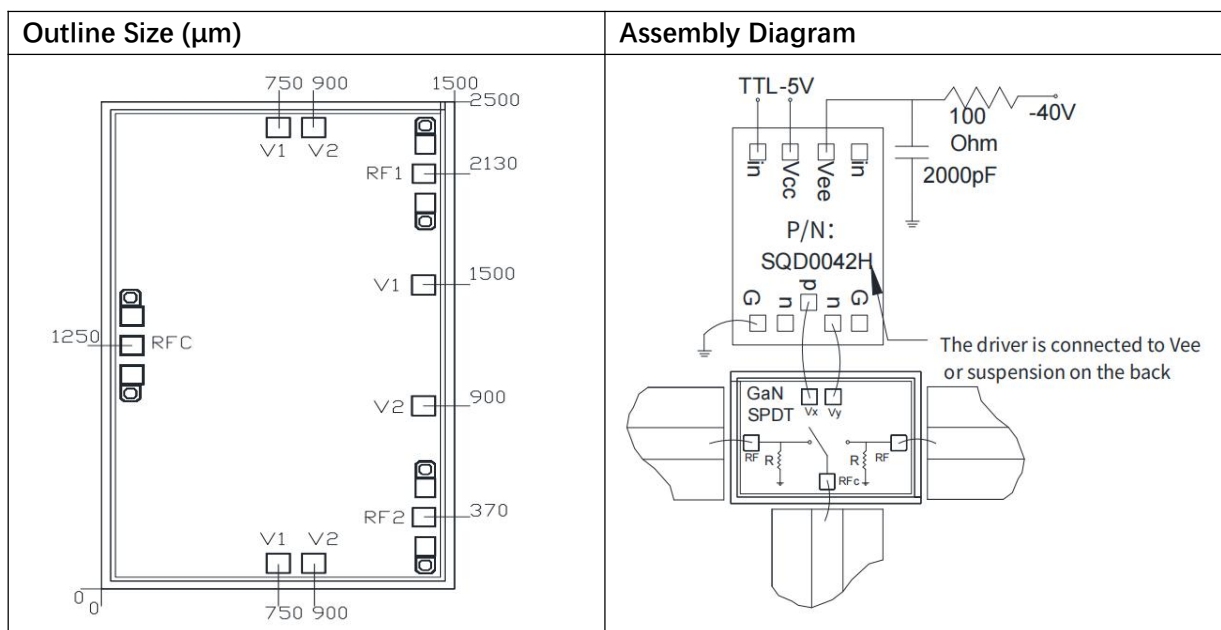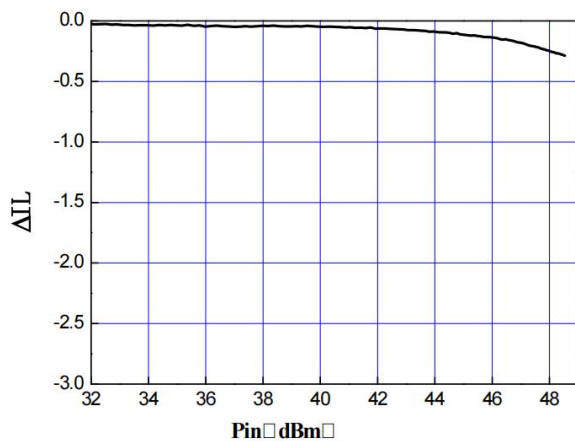

Note: 1, For same pads, choose any of them.

2, RF input/output gold wire length is less than 300μm.

**PIN Definition**

| PIN     | Description             |
|---------|-------------------------|
| RF1、RF2 | RF ports, 50Ω           |
| RFc     | RF common ports, 50Ω    |
| V1、V2   | Control Ports           |
| GND     | Bottom must be grounded |

**Truth Table**

| V1 | V2 | RF <sub>c</sub> →RF1 | RF <sub>c</sub> →RF2 |
|----|----|----------------------|----------------------|
| 1  | 0  | OFF                  | ON                   |
| 0  | 1  | ON                   | OFF                  |

Note: Low level "0" is -28V~-40V, High level "1" is 0V~0.5V